

# Table of Contents

<b>NAT Flow configuration</b> .....	3
<i>Configuring reception of a separate NAT Flow stream from DPI or Netstream</i> .....	3
<i>Enabling NAT event import from FullFlow</i> .....	4
<i>NAT Flow aggregation</i> .....	5




# NAT Flow configuration

There are three ways to generate a NAT log in QoE Stor (statistics server):


1. Receive the NAT Flow as a separate stream from the SSG. To do this, configure [export of translations to external collectors](#) on the SSG device;
2. Receive NAT Flow from Netstream of third-party systems (not from SSG);
3. Generate NAT Flow from FullFlow using QoE Stor.

## Configuring reception of a separate NAT Flow stream from DPI or Netstream

1. Go to: Administrator → QoE Stor Configuration;

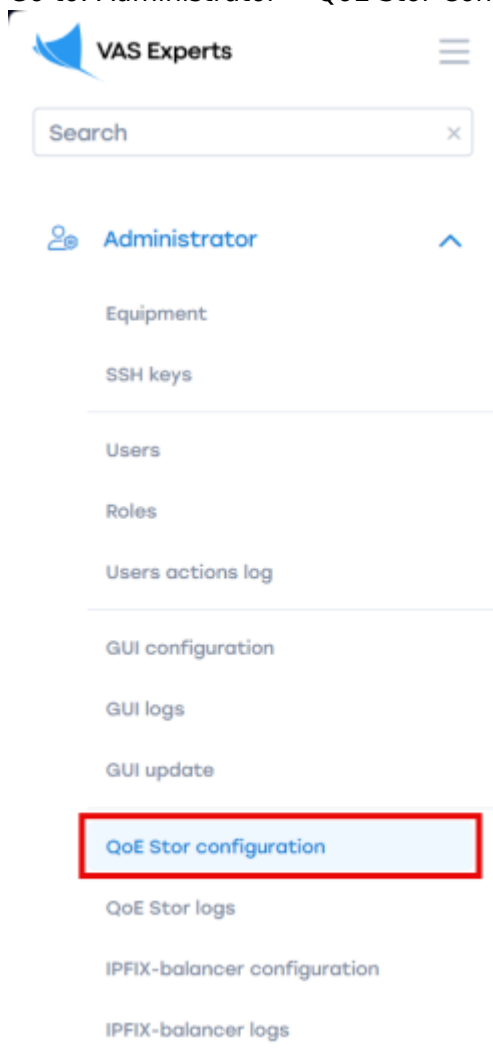


2. Go to the "Receivers" section; add a new receiver; select "Receiver type" — NAT Flow; fill in the receiver form and click "Apply";

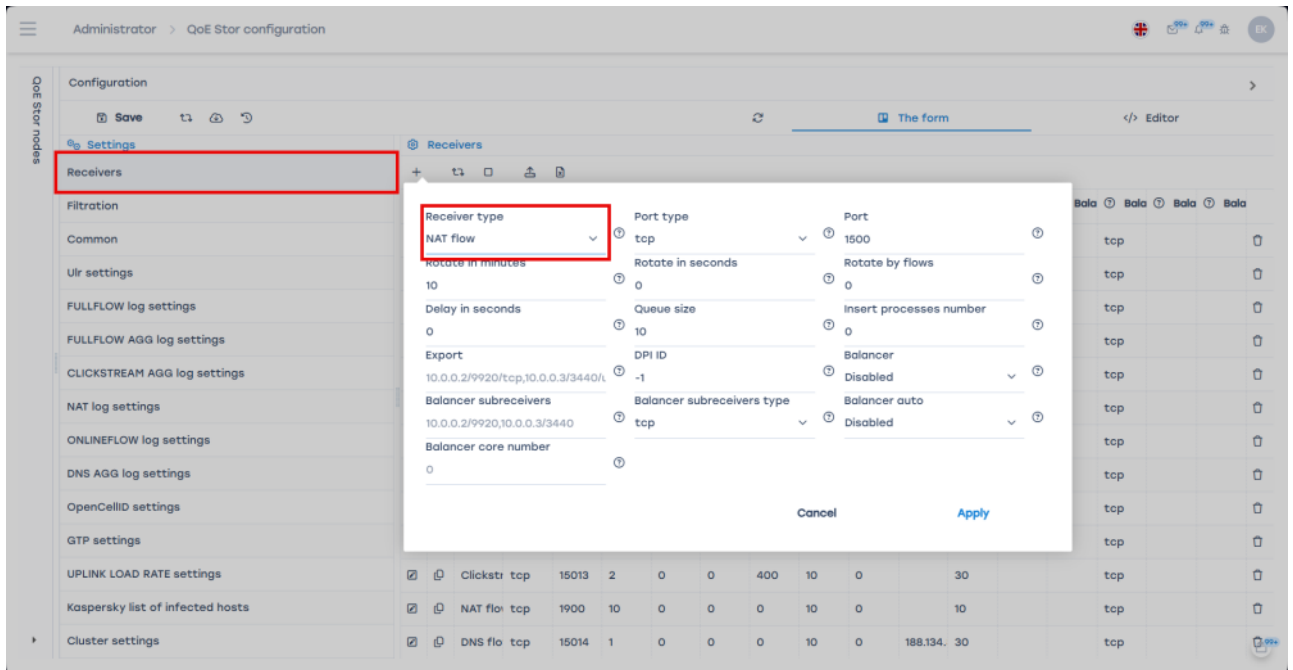

3. Go to the "NAT Log Settings" form section:


1. Enable IP-LOGIN binding from fullflow (FILL\_IP\_LOGIN\_BINDING\_FROM\_FULLFLOW);
2. Enable adding LOGIN to NAT log from IP-LOGIN binding (NAT\_ADD\_LOGIN\_FROM\_IP\_LOGIN\_BINDING).

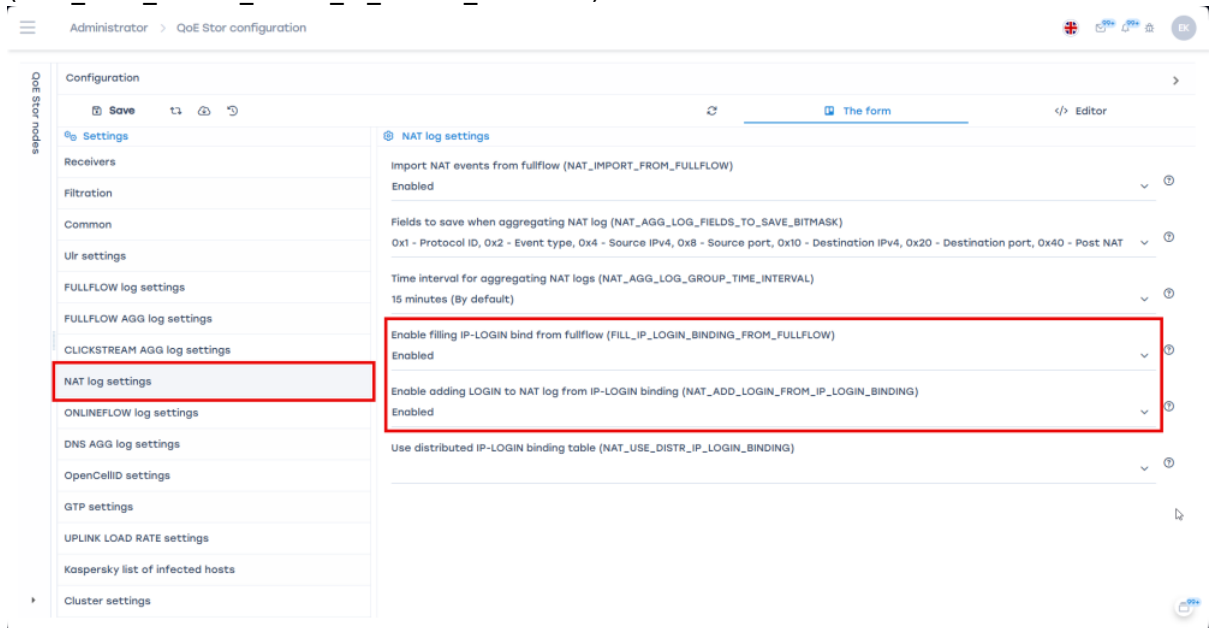


## Enabling NAT event import from FullFlow

To enable importing NAT events from FullFlow transmitted from DPI to QoE Stor:

1. Go to: Administrator → QoE Stor Configuration;

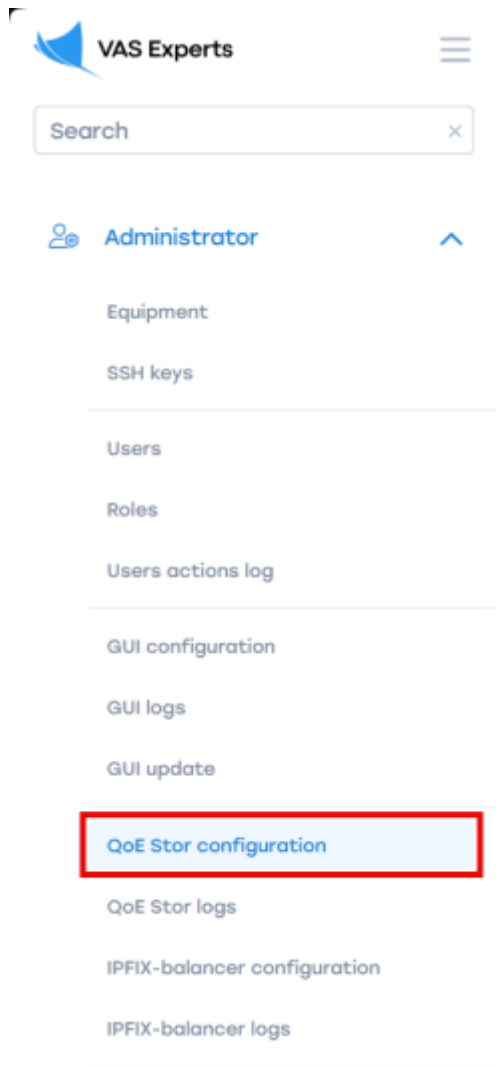


2. Enable NAT event import from fullflow (NAT\_IMPORT\_FROM\_FULLFLOW).

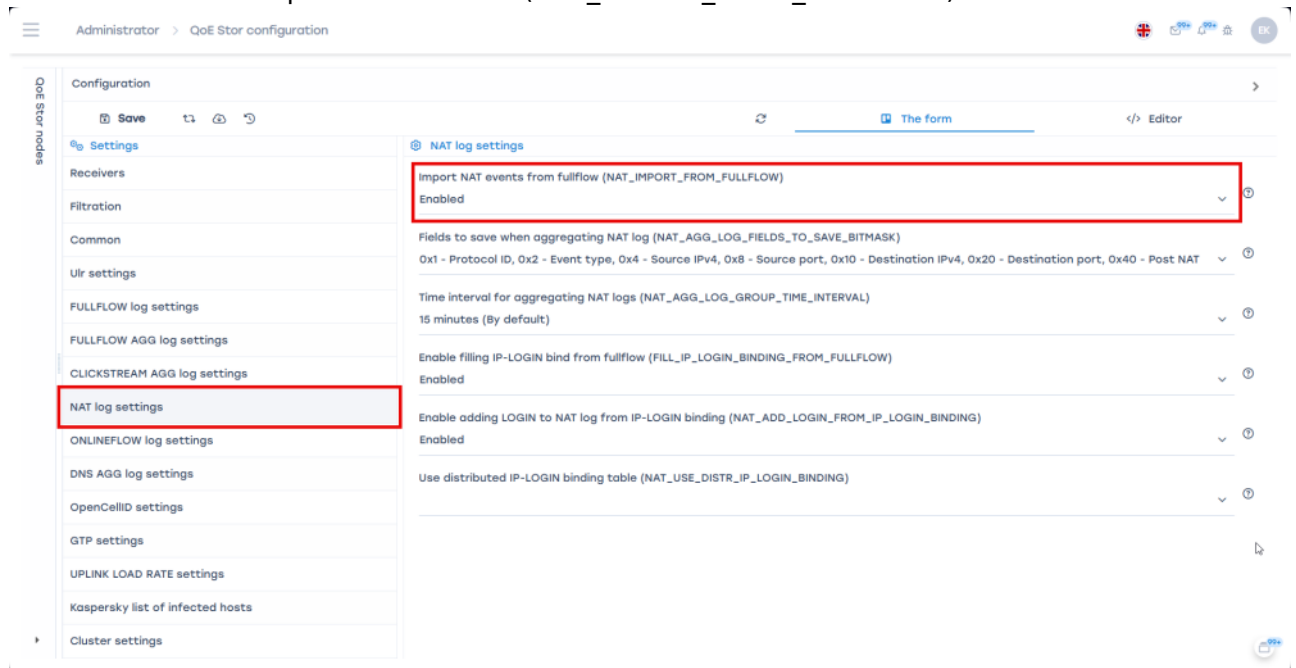


## NAT Flow aggregation

1. Go to: Administrator → QoE Stor Configuration;

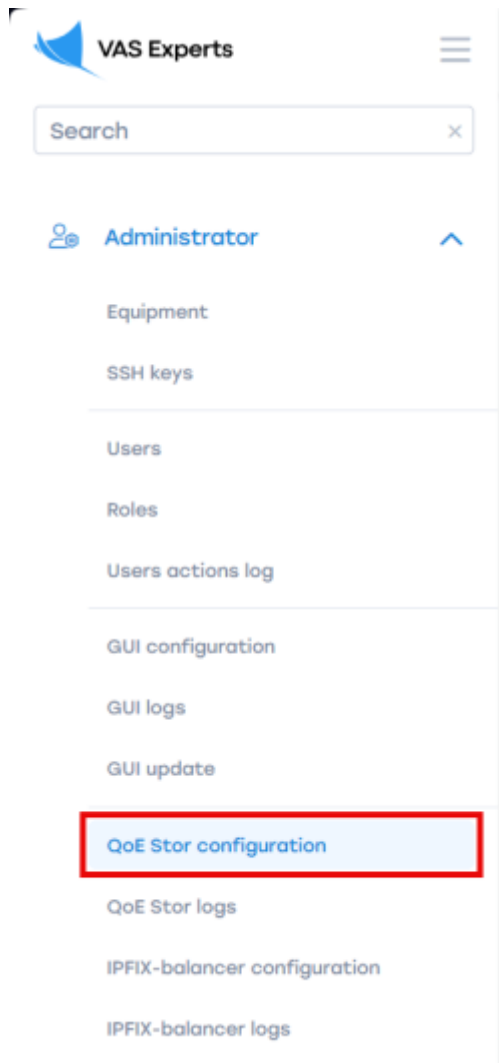

2. Select "NAT Log Settings" → choose fields to save when aggregating the NAT log and set the log fill time interval (default: 15 minutes);

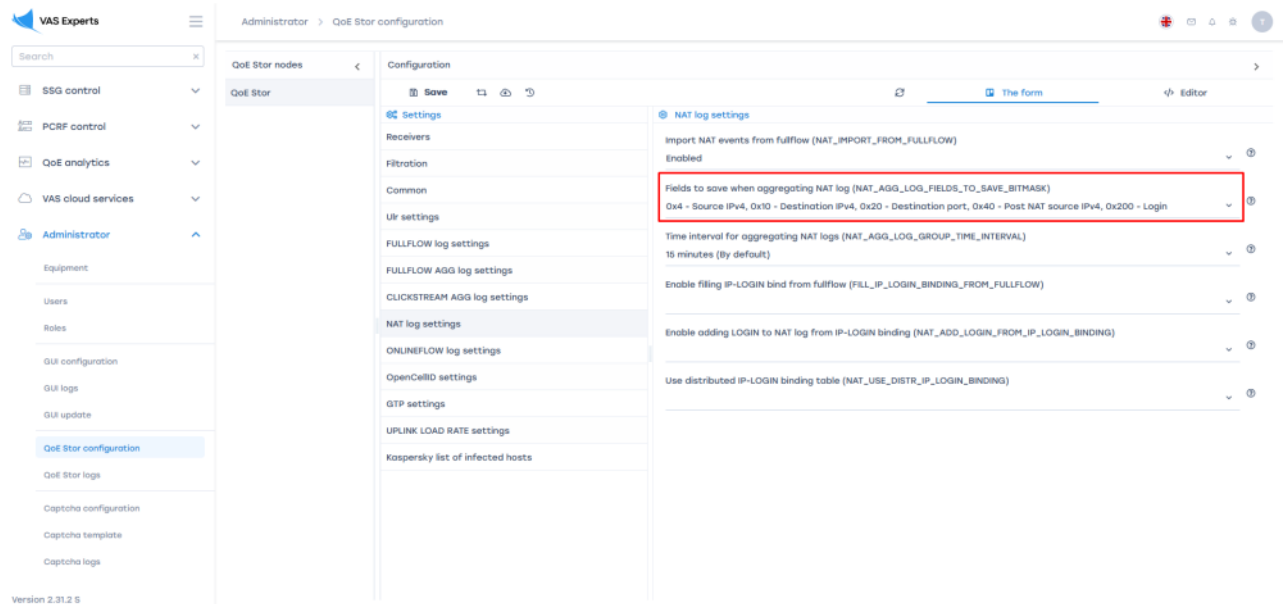

3. Save the changes and restart the service.