

Содержание

6 Filtering rules management interface	3
Universal Locking Rules UI	3
Introduction	3
Installation	3
Configuration	3
.env Configuration	3
Key Installation	4
Roles Management	5
Dictionaries Configuration	6
IGW Profiles Management	10
Web Server for Global Lists Configuration	12
Web-server	12
DSCP Rules	13
ASN Filter	14
IP & ASN Excludes	16
IP Excludes	17
ASN Excludes	19
VIP Subscriber Management	21
ISP Configuration	23
Creating an ISP Profile	23
Editing ISP Profile	24
Deleting ISP Profile	24
Policing Profile	25
WEB and IP Filter	26
Locking Rules List	26
Creating/Editing Locking Rules	26
Deleting the Locking Rule	27
Domain Check	28
Search the Database (among the blocking rules)	29
Whitelist	30
Whitelist rule list	30
Creating/Editing the white list	30
Deleting a white list rule	31
Whitelist operating mode management	32
Database search (global)	32
Task monitoring	33
Logs	33

6 Filtering rules management interface

Universal Locking Rules UI

Introduction

Universal locking rules (ULR) UI is designed to manage filtering rules on multiple DPIs simultaneously using a graphical interface.

Installation

Equipment or virtual machines with the following characteristics are suitable for the subsystem:

1. CPU 2.5 GHz, 2-4 cores
2. RAM from 8 GB (mainly for sphinx)
3. Hard drive (HDD) 50 GB - 250 GB
4. Cent OS 7+ operating system (we do not recommend to not install minimal, because most of the dependencies will have to be installed manually)
5. Network Card (NIC) from 10 Mbps



We recommend Cent OS 7+ operating system. **Do not not install minimal, because most of the dependencies will have to be installed manually.** If you need to install software on Cent OS 6, make sure that supervisor 3+ is installed. If you do not have the package, please contact technical support.



The locking rules management interface is a special section of [The VAS Experts DPI Graphical User Management Interface ver.2](#). The installation is similar to the script of [The VAS Experts DPI Graphical User Management Interface ver.2](#).

Configuration

.env Configuration

The subnet configuration is handled with .env file.

```
/var/www/html/dpiui2/backend/.env
```

The file contents:

```
#Redirect URL for "White list" service
ULR_WHITE_LIST_REDIRECT_URL=https://google.com

#The period after Ulr tasks data is deleted (days)
ULR_QUEUE_DELETE_TASKS_DAYS_INTERVAL=1

#ASN for IP-exception rules
ULR_IP_EXCLUDE_ASN=64401

#The host for blocked resources list deployment. To connect the blocked
resources server.
ULR_BLACK_LIST_DEPLOY_HOST=<IP address or host of global locks web-server>

#The port for blocked resources list deployment. To connect the blocked
resources server.
ULR_BLACK_LIST_DEPLOY_PORT=22

#Username for blocked resources list deployment. To connect the blocked
resources server.
ULR_BLACK_LIST_DEPLOY_USER=default

#Password for blocked resources list deployment. To connect the blocked
resources server.
ULR_BLACK_LIST_DEPLOY_PASS=

#To use sudo for blocked resources list deployment. (0 - do not use, 1 -
use)
ULR_BLACK_LIST_DEPLOY_SUDO=1

#Black lists saving path.
ULR_BLACK_LIST_DEPLOY_PATH=/var/www/html/blacklists/

#Log Detail Level (0 - info, 1 - debug, 2 - tracing).
ULR_LOAD_LOG_LEVEL=0
```



After changing the .env file, you need to run the command

```
php /var/www/html/dpiui2/backend/artisan queue:restart
```



These settings can be added to the configuration in the Administrator → DPIUI2 Server Configuration section in the The VAS Experts DPI Graphical User Interface ver.2.

Key Installation

To use the Universal Locking Rules UI, you need to activate the ULR-license in DPIUI2 with a command:

```
dpui2 ulr_lic --make=1
```

Next:

1. Enter license level: standard
2. Enter the license completion date in the Y-m-d format (e.g. 2099-12-31)
3. Enter the license password.

If the data is correct, a success message will be displayed:

```

dpiui2 ulr_lic --make=1
Enter level:
> standard

Enter expire date in Y-m-d format:
> 2099-12-31

Enter password:
>

stdClass Object
(
    [success] => 1
)

```

Roles Management

In the DPIUI2 interface visit the Administrator → Roles section. Create a new role and set read and write permissions in the ulr admin section:

The screenshot shows the 'MANAGING USERS AND ROLES / ROLES' interface. On the left, the 'Roles' sidebar lists 'Administrator' and 'vrt' (highlighted with a green arrow). The main table displays the following roles and their details:

Code	Section	Best	Download
administrator_roles	Roles	☐	☐
administrator_send_email	Send Email	☐	☐
administrator_dpi2	Administrator DPI2	☐	☐
rescloud	VMS Cloud	☐	☐
socket	Websocket notifications	☐	☐
vrt	Universal lock rules	☒	☒
vrt_vms_rules	Universal lock rules / VMS & IP filter	☒	☒
vrt_vrtx_rules	Universal lock rules / Virtualnet	☒	☒
vrt_policings	Universal lock rules / Applications & policings	☒	☒
vrt_app_rules	Universal lock rules / AOA filter	☒	☒
vrt_excludes	Universal lock rules / IP & ASN excludes	☒	☒
vrt_db_search	Universal lock rules / Database search	☒	☒
vrt_ip_acl_profiles	Universal lock rules / ISP's & RIR's profiles	☒	☒
vrt_dicts	Universal lock rules / Dictionaries	☒	☒
vrt_system_state	Universal lock rules / System global state	☒	☒
scan	Lawful interception	☐	☐
scan_connections	Lawful interception / connections	☐	☐

Next, go to the Administrator→ Users section. Create a new user and set him the role that you created earlier.

- Category Dictionary
- Regulators Dictionary



These dictionaries are used for creating/editing locking rules.

Category Dictionary


In the Locking Rules management interface go to the Dictionaries → Categories section.

Creating

Fill in the form with category name and description and click the "Add" button.


Editing

To edit: click on the category editing button in the categories table. In the form, change the name and/or description of the category, then click the "Save" button.

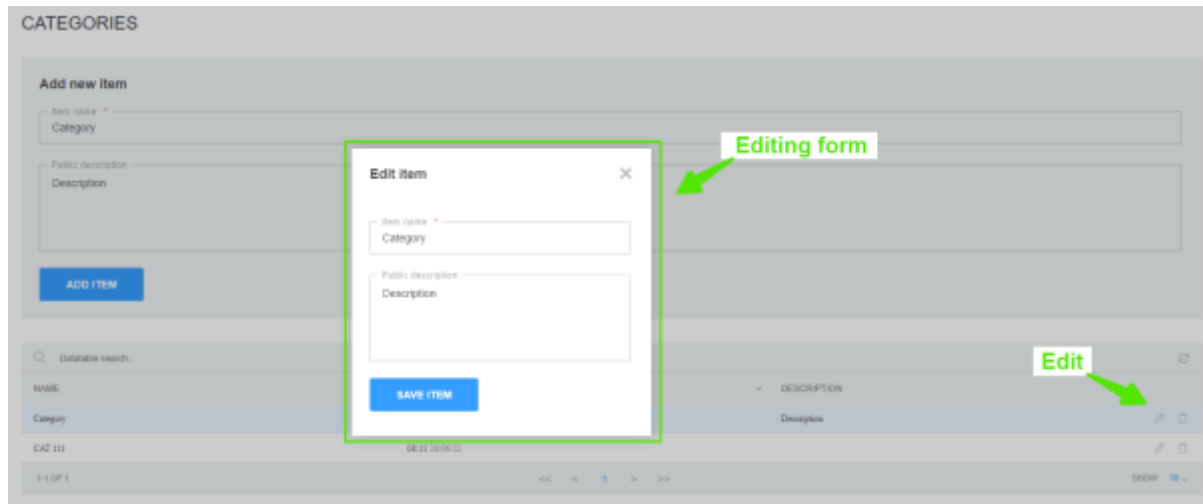

Deleting


Click on the delete category button in the categories table. In the pop-up window confirm or cancel the action.

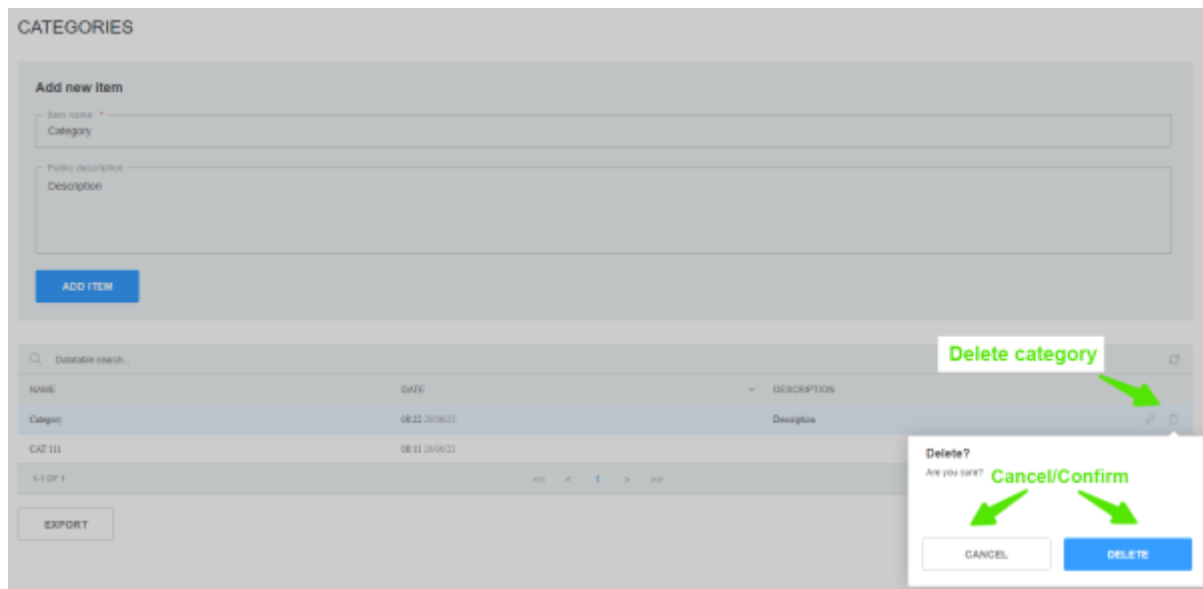

Attention: Before deleting a category, make sure there are no rules referring to this category!

Regulators Dictionary

In the Locking Rules management interface go to the Dictionaries → Regulators section.

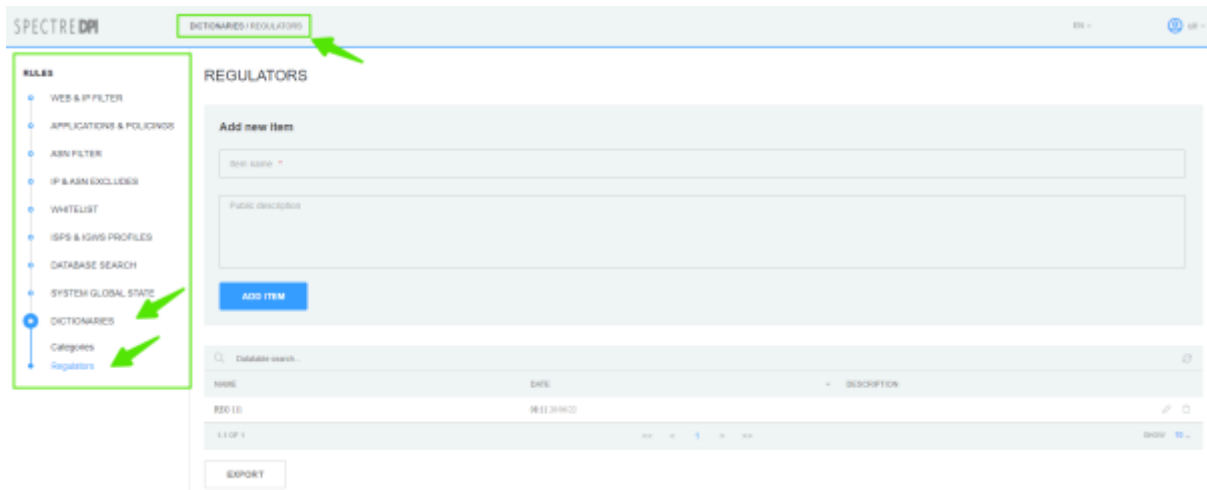

Creating

Fill in the form with regulator name and description and click the "Add" button.

REGULATORS

Add new item


Item name: Regulator

Public description: Description

ADD ITEM


Editing

To edit: click on the regulator editing button in the regulators table. In the form, change the name and/or description of the regulator, then click the "Save" button.

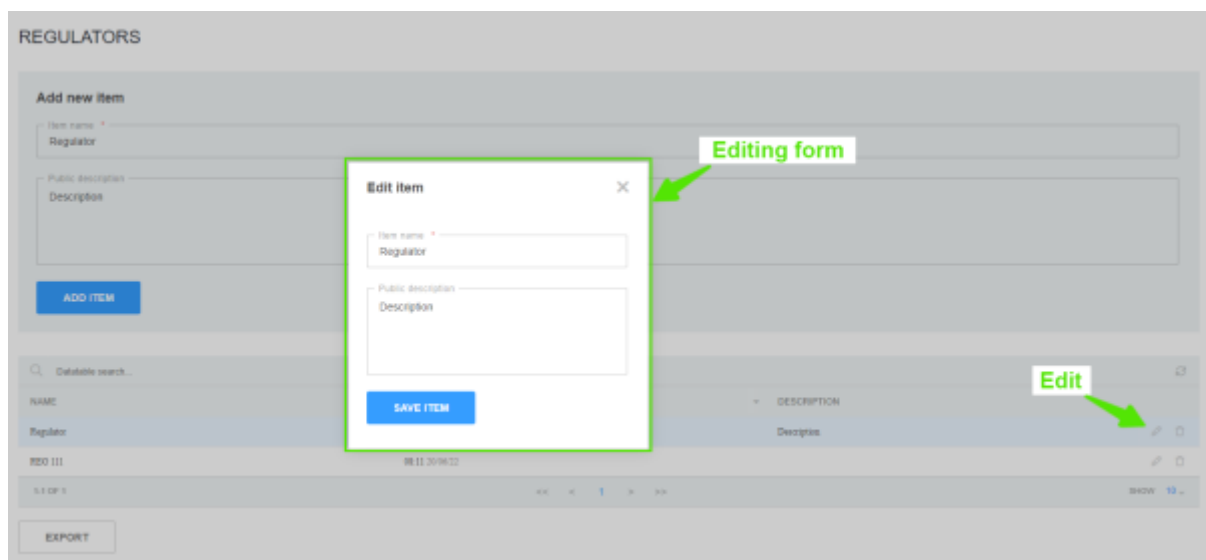

Deleting


Click on the delete regulator button in the categories table. In the pop-up window confirm or cancel the action.

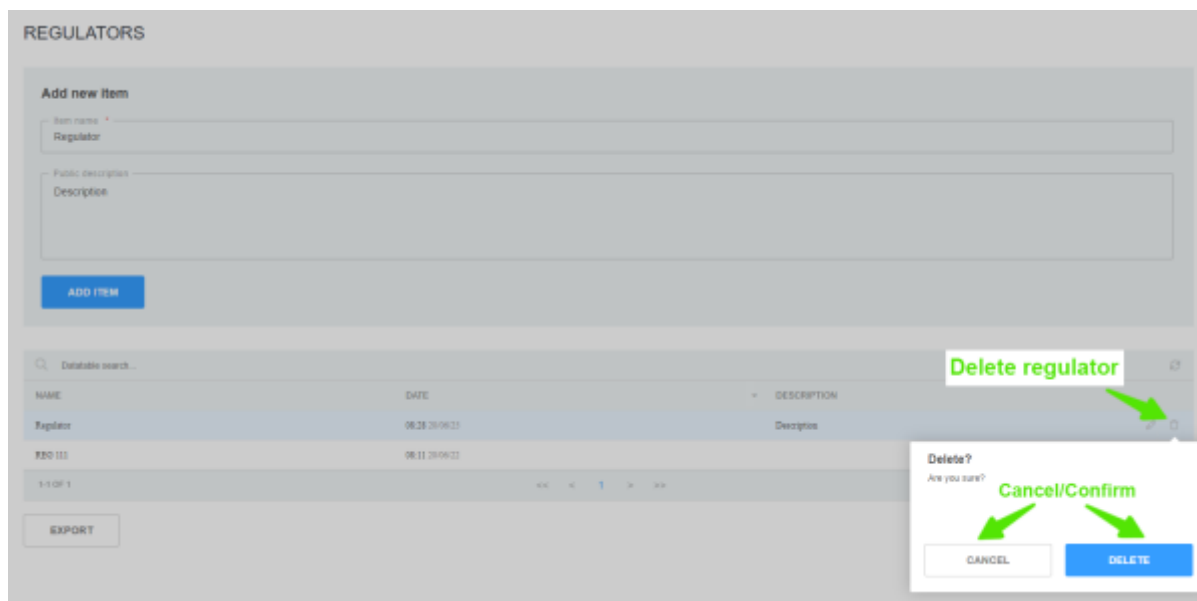

Attention: Before deleting a regulator, make sure there are no rules referring to this regulator!

IGW Profiles Management

Change to the section "ISPS & IGWS Profiles" → "IGWs List".

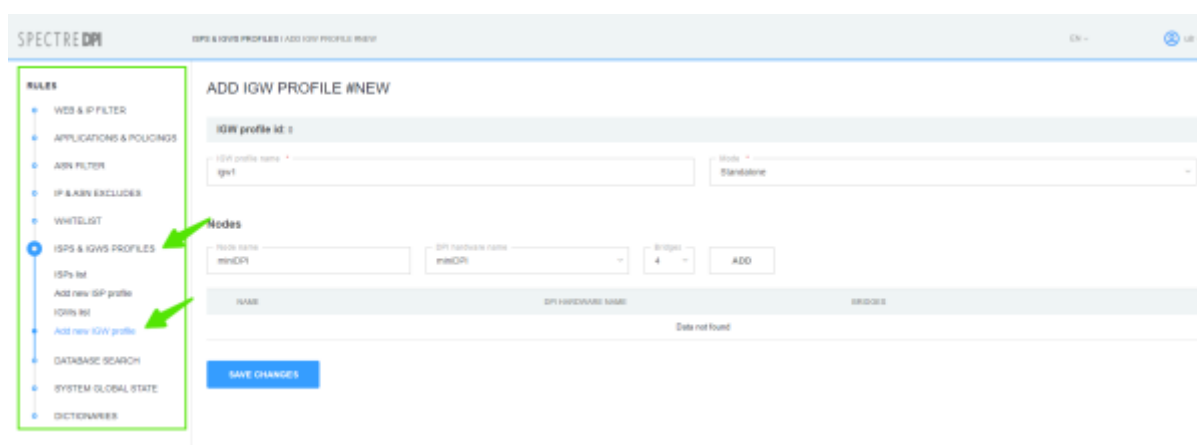

Creating

To create new IGW profile change to the section "ISPS & IGWS Profiles"→"Add new IGW profile".

In the form specify:

- Profile name;
- Operation mode (Standalone/Cluster)

- Nodes for the profile (Node name, DPI from the list of available equipment and number of bridges)

ADD IGW PROFILE #NEW

IGW profile id: 1

IGW profile name: Mode:

Nodes

Node name: DPI hardware name: Bridges:

NAME	DPI HARDWARE NAME	BRIDGES
Data not found		

IGW adding form



Before creating IGW profile add FastDPI server in the main section of DPIUI 2 Administrator -> Devices

Editing

In the "ISPS & IGWS Profiles" → "IGWs List" section click the button "Edit profile".

IGWS LIST


Select IGW profile from the list

Database search...			
NAME	MODE	DATE	
IGW1111	Standalone	10:16 20/05/19	Edit profile SHOW 10
1-1 OF 1			
EXPORT			

The IGW profile creation/editing form will open. Make the changes you need and click "Save Changes".

Deleting

In the "ISPS & IGWS Profiles" → "IGWs List" section click the button "Delete" and confirm/cancel the operation.

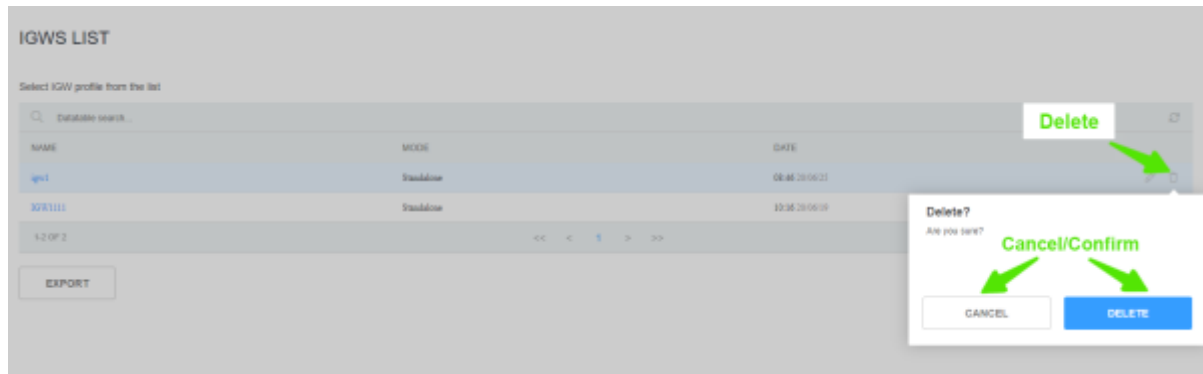

Attention: Before deleting a profile, make sure there are no ISP profiles referring to this category!

Web Server for Global Lists Configuration

Web-server

1. Prepare a machine with CentOS7+ installed
2. Create a sudo user without password as described in [Dpiui2: DPI connection details](#) section
3. Run the script:

```
rpm --import http://vasexperts.ru/centos/RPM-GPG-KEY-vasexperts.ru
rpm -Uvh http://vasexperts.ru/centos/6/x86_64/vasexperts-repo-1-0.noarch.rpm
yum install dpiutils -y
yum install httpd -y
yum install unzip -y

mkdir /var/www/html/blacklists
chmod -R 777 /var/www/html/blacklists

echo "
<VirtualHost *:80>
    DocumentRoot \"/var/www/html/blacklists\"

    <proxy *>
        Order deny,allow
        Allow from all
    </proxy>
</VirtualHost>
" > /etc/httpd/conf.d/bl_lists.conf

firewall-cmd --permanent --add-port=80/tcp
firewall-cmd --reload
```

```
systemctl enable httpd.service
systemctl restart httpd.service
```

4. In dpiui2 configuration [specify the web-server access parameters in ULR settings section](#)

5. Specify the path to Custom lock list in the settings of all connected FastDPI servers:

```
# URL dictionary for blocking by HTTP (custom_url_black_list)
custom_url_black_list=http://<IP address of Web-server>/blacklist.dict


# Names dictionary for blocking HTTPS protocol by certificate
(custom_cname_black_list)
custom_cname_black_list=http://<IP address of Web-server>/blacklistcn.dict

# IP addresses dictionary for blocking HTTPS by IP (custom_ip_black_list)
custom_ip_black_list=http://<IP address of Web-server>/blacklistip.dict

# Host names dictionary for blocking HTTPS by SNI (custom_sni_black_list)
custom_sni_black_list=http://<IP address of Web-server>/blacklistsni.dict
```

DSCP Rules

Change to "Applications and policings" section → "DSCP Rules".

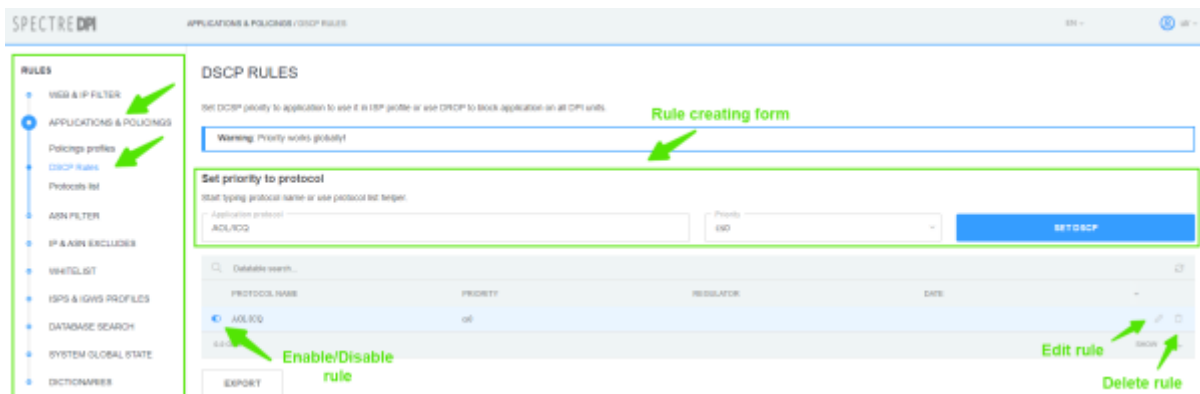

Creating


In the form of rule creating:

- Enter the name of application protocol and choose one from the list;
- Choose the priority from the list.

Save the rule by clicking on "Set DSCP" button.


Editing

In the list of DSCP rules click on "Edit rule" button. In the popup editing form set the necessary priority and save changes by clicking on "Set DSCP" button.

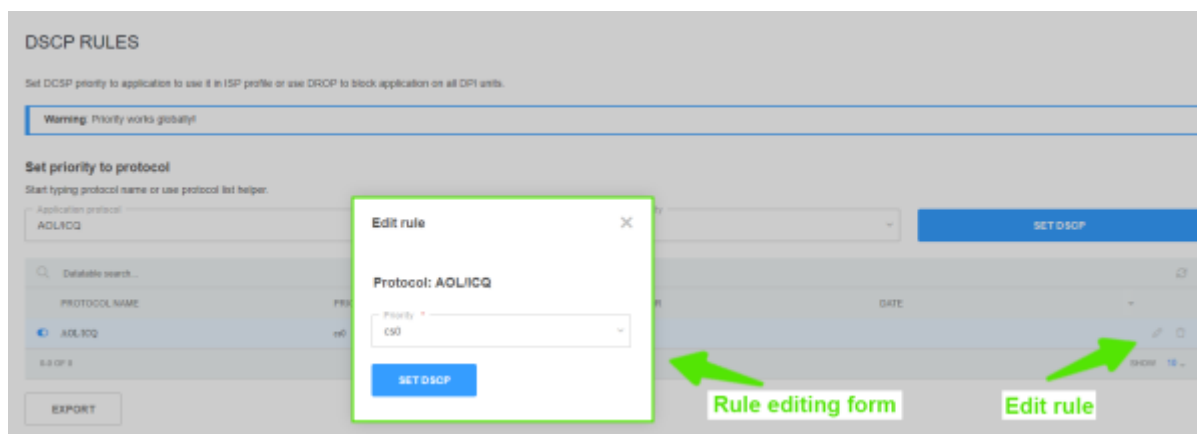

Deleting

In the DSCP rules list click the button "Delete rule" and confirm/cancel the operation.

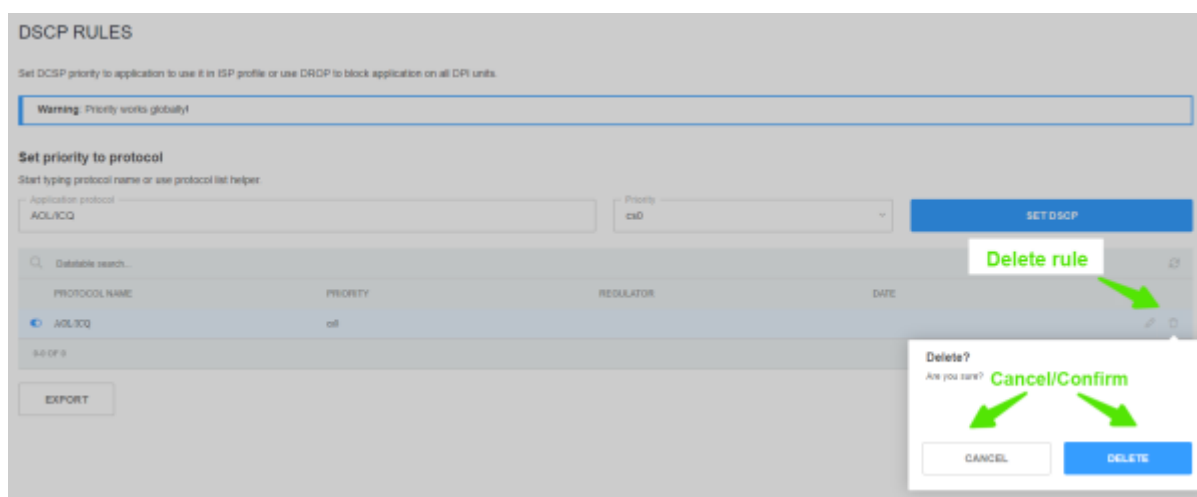

ASN Filter

Change to the "ASN Filter" section.

SPECTRE DPM ADMINISTER DSCP RULES

RULES

- WEB & IP FILTER
- APPLICATIONS & POLICIES
- ASN FILTER**
- IP & ASN EXCLUDES
- WHITELIST
- QoS & QoS PROFILES
- DATABASE SEARCH
- SYSTEM GLOBAL STATE
- DICTIONARIES

DSCP RULES

Set DSCP priority to ASN direction to use it in ISP profile or use DSCP to block ASN traffic on all DPM units

Warning: Priority works globally!

Rule creating form

Add new rule

AS number: 1001 Priority: 100

Rule name: Rule1

Rule Description: Rule1 Description

SET DSCP

AS NUMBER	RULE NAME	PRIORITY	REGULATIONS	DESCRIPTION	DATE
1001	Rule1	100		Rule1 Description	27-01-2019 12:00

1 of 1

EXPORT

Edit rule

Delete rule

Enable/Disable rule

Creating

In the form of rule creating:


- Specify the number of AS;
- Choose the priority from the list;
- Enter the rule name;
- Enter the rule description.

Save the rule by clicking on "Set DSCP" button.

Editing

In the list of DSCP in ASN direction rules click on the "Edit rule" button. If necessary, in the popup editing form:


- choose the priority from the list;
- Enter the rule name;
- Enter the rule description.

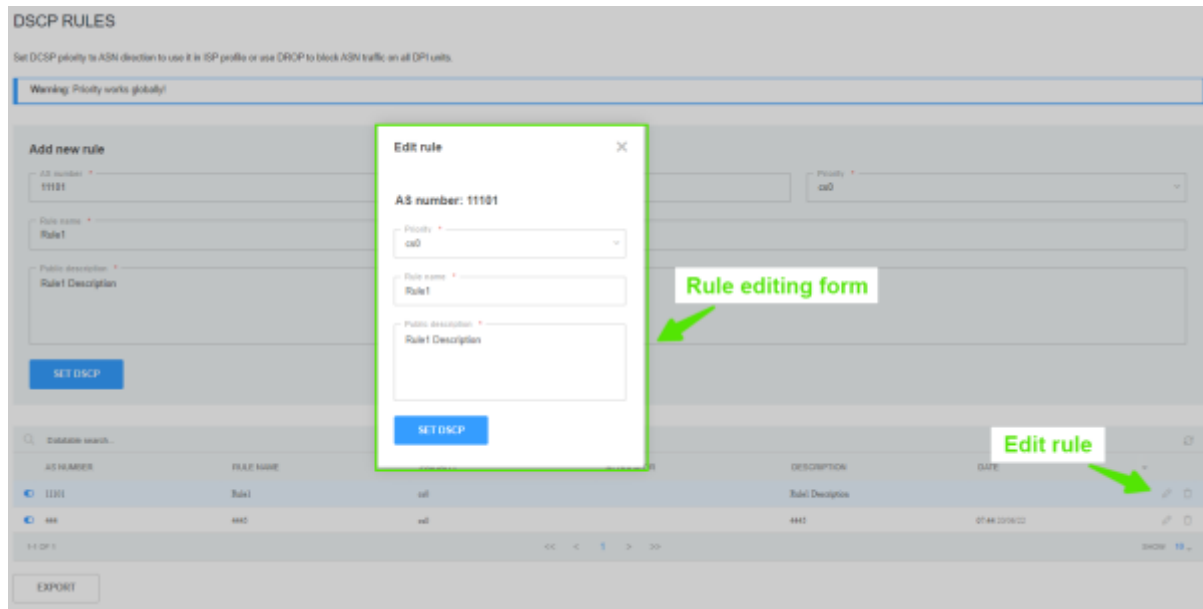

Save the changes by clicking on "Set DSCP" button.


Deleting

In the list of DSCP in ASN direction rules click the button "Delete rule" and confirm/cancel the operation.

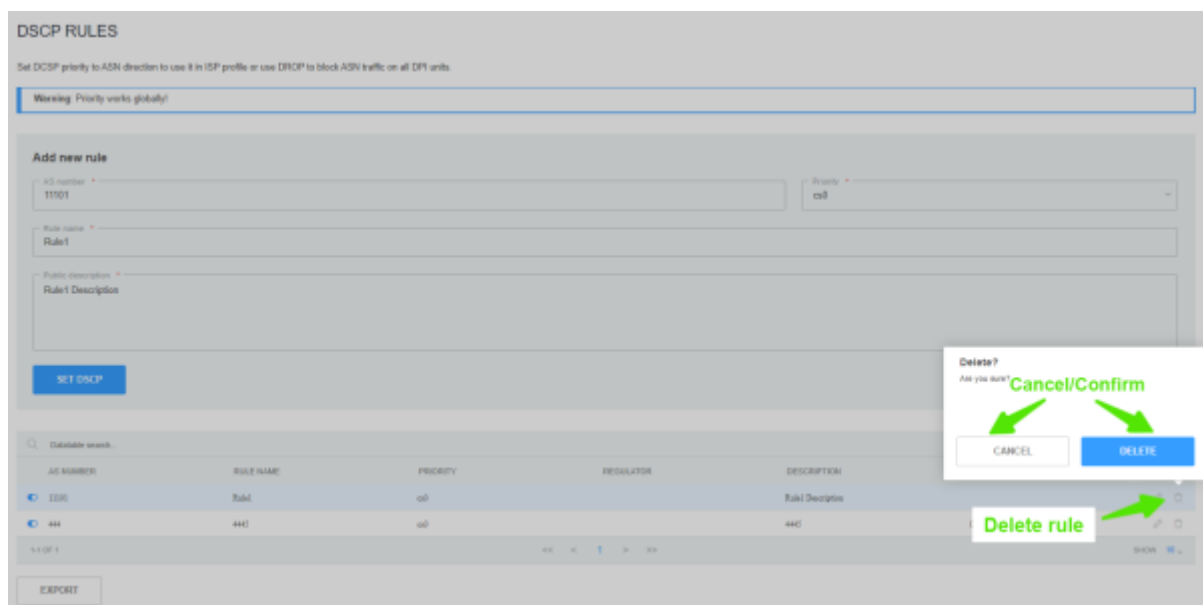


IP & ASN Excludes

Change to the "IP & ASN Excludes" section.

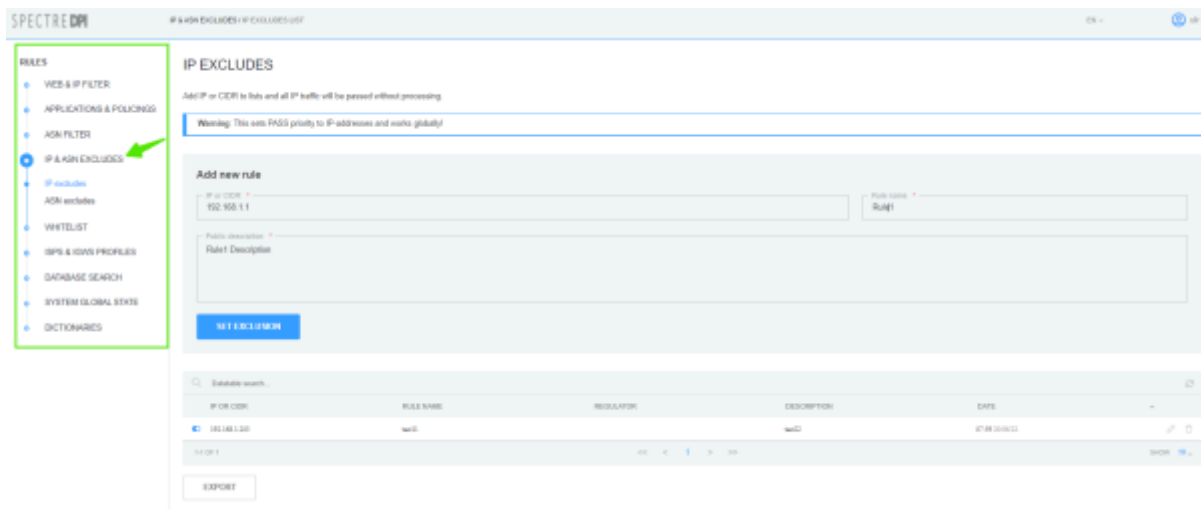

IP Excludes

Change to the "IP & ASN Excludes" section → "IP Excludes".

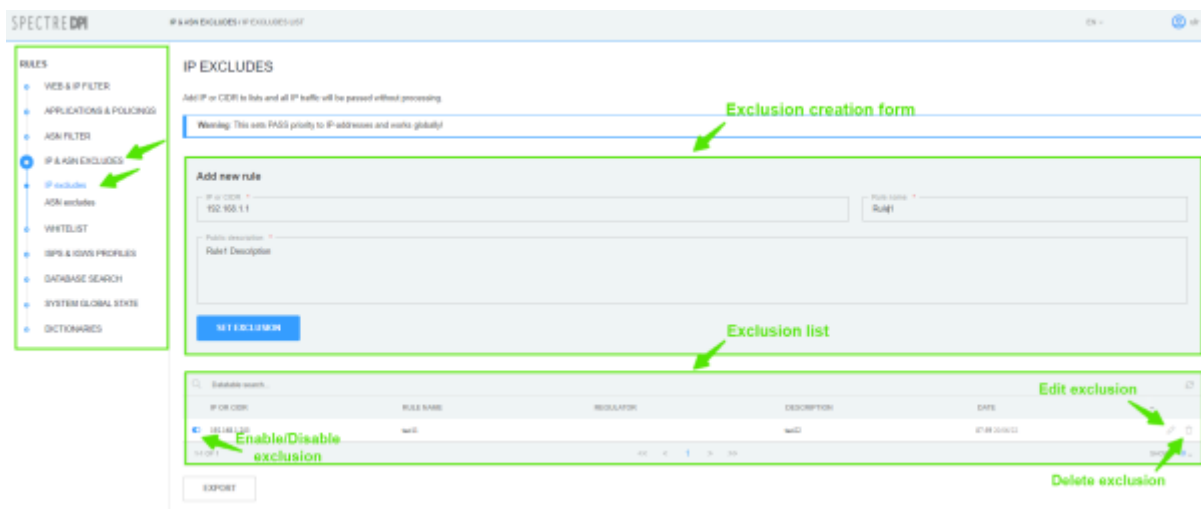

Creating

In the form of rule creating:

- Specify IP/CIDR;
- Enter the rule name;
- Enter the rule description;

Save the rule by clicking on "Set exclusion" button.

Editing

Click on the button "Edit exclusion". In the form of rule editing you can change:

- name of the rule;
- its description.

ASN Excludes

Change to the "IP & ASN Excludes" section → "ASN Excludes".

The screenshot shows the SPECTRE DPM interface for IP & ASN Excludes. The left sidebar has a menu with 'IP & ASN EXCLUDES' selected. The main content area is titled 'IP EXCLUDES' and includes a warning message: 'Warning: This sets PASS priority to IP addresses and marks globally!'. Below this is a form to 'Add new rule' with fields for 'IP or CIDR' (containing '192.168.1.1'), 'Rule Name' (containing 'Rule1'), and 'Rule Description'. A 'SET EXCLUSION' button is at the bottom of the form. Below the form is a table with columns: 'IP OR CIDR', 'RULE NAME', 'REGULATION', 'DESCRIPTION', and 'DATE'. The table contains one row with the value '192.168.1.1' in the 'IP OR CIDR' column and 'Rule1' in the 'RULE NAME' column. An 'EXPORT' button is at the bottom of the table.

Creating

In the form of rule creating:

- Specify AS number;
- Enter the rule name;
- Enter the rule description;

Save the changes by clicking on "Set Exclusion" button.

Editing

Click on the button "Edit exclusion". In the form of rule editing you can change:

- name of the rule;
- its description.

Edit rule

AS number: 1234

Rule name *

Rule1

Public description *

Rule1 Description

SET DSCP

Save the changes by clicking on "Set DSCP" button.

Deleting

In the list of exclusions click the button "Delete exclusion" and confirm/cancel the operation.

ASN EXCLUDES

ASN AS numbers to lists and all ASN traffic will be passed without processing

Warning: This sets PASS priority to AS numbers and works globally!

Add new rule

AS number *

Rule name *

Public description *

SET EXCLUSION

Database search...

AS NUMBER	RULE NUMBER	REGULATOR	DESCRIPTION	DATE
1234	name 123451		name 123456	2020-10-06-02

1/1 OF 1

EXPORT

Delete exclusion

Delete? Are you sure?

Cancel/Confirm

CANCEL DELETE

VIP Subscriber Management

VIP Subscribers and their privileges

VIP Subscriber is a special subscriber whose traffic is passed with a dedicated priority (default is cs0) regardless of the priority settings for application protocols. The allocated priority is set by the special_dscp configuration parameter. See section [Configuration](#). The subscriber is connected through the installation of service 15 on DPI.

Privilege:

- Unlimited access to applications and resources that are subject to restrictions on use.

Purpose of section

This section is designed to manage VIP Subscribers.

Getting started with section

Go to "IP & AC Exclusion"→"VIP Subscribers".

The screenshot displays the 'VIP SUBSCRIBERS LIST' page. The left sidebar contains a navigation menu with options like 'WEB & IP FILTER', 'APPLICATIONS & POLICIES', 'AS & DROP', 'IP & ASN EXCLUDES', 'IP excludes', 'ASN excludes', 'VIP subscribers', 'WHITELIST', 'ISPs & ISPs PROFILES', 'DATABASE SEARCH', 'SYSTEM GLOBAL STATE', and 'DICTIONARIES'. The main content area features a warning message: 'Warning: This VIP subscriber's rule is not globally if no ISPs are specified!'. Below this is the 'Add new rule' form, which includes a 'Type' dropdown set to 'Subscriber' and a checkbox for 'Apply the rule to ISPs from the list'. At the bottom of the page, there is a table titled 'Last entries of VIP subscribers' with columns for 'RULE', 'DATE', 'TYPE', 'RESOURCE NAME', and 'MODE'. The table contains one entry with rule ID 1, dated 02-08-2019, of type 'IP', with resource name '143.12.46.32', and mode 'OFF'. To the right of the table are buttons for 'ON / OFF' and 'EXPORT'. Annotations with green arrows point to various elements: 'VIP Subscriber creation form' points to the 'Add new rule' form; 'Edit VIP Subscriber' points to the 'Edit' icon in the table; 'Deleting VIP Subscriber' points to the 'Delete' icon in the table; 'ON / OFF Subscriber' points to the 'ON / OFF' button in the table; and 'VIP Subscriber creation form' also points to the 'Add new rule' form.

Creation

In the form of creating a VIP Subscriber:

- BSelect the type of IP or Login from the drop-down list;
- Specify IP or Login in the Subscriber field, depending on what you have chosen in the drop-down list;
- You can apply the rule to an ISP from the list and select multiple ISPs or click on the "Select All" button. If you accidentally clicked the "Select All" button, then click on the "Uncheck All" button;
- If your slider is disabled on apply to specific ISPs, then the new rule will be set globally to all ISPs.

Add new rule Enable or disable application to a specific ISP

Type: Subscriber:

☒ Apply the rule to ISPs from the list

Select ISP which the rule will be applied

☐ ISP Select all / Unselect all ISP ☒ Ростелеком ☐ SkyNet

☒ ДомРy ☐ МНС

Add VIP Subscriber

Save the VIP Subscriber by clicking the "Add" button.

Editing

Click on the "Edit VIP Subscriber" button. In the rule editing form, you can change:

- Application to certain ISPs from the list;
- Remove or add ISP.

Edit rule ×

VIP subscriber IP is 143.12.41.32.

☒ Apply the rule to ISPs from the list

Select ISP which the rule will be applied


☒ ISP ☐ Ростелеком ☐ SkyNet

☐ ДомРy ☐ МНС

Save your changes by clicking the "Save" button.


Deleting

In the list of VIP Subscribers, click on the "Delete VIP Subscriber" button and, in the window that appears, confirm or cancel the deletion.

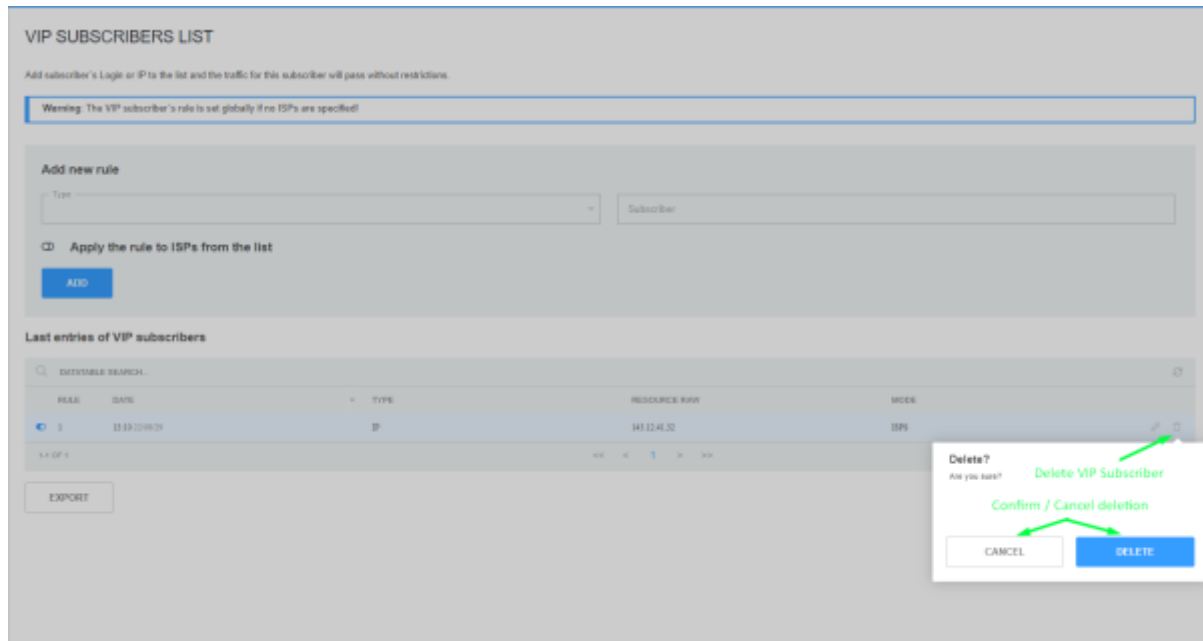

ISP Configuration

Change to the "ISPS & IGWS Profiles" → "ISPs List".

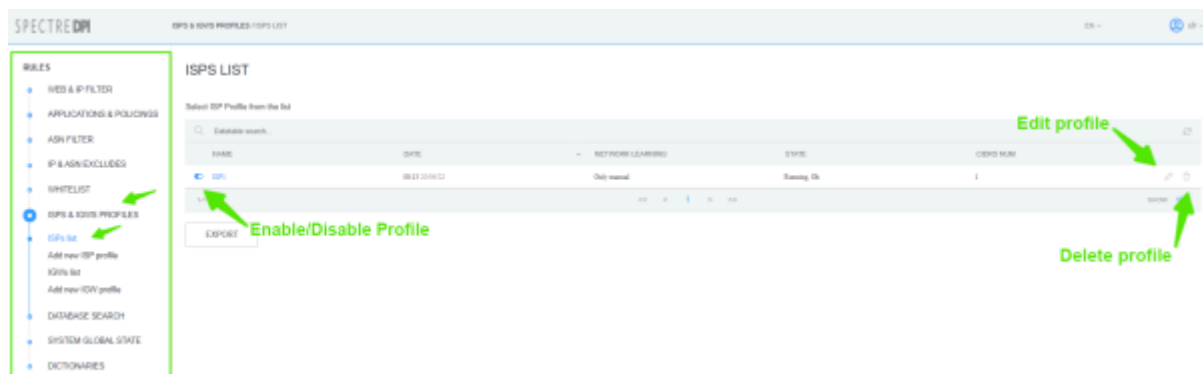

Creating an ISP Profile

To create new IGW profile go to the "ISPS & IGWS Profiles" section → "Add new ISP Profile".

In the form specify:

- Name of ISP profile;
- Choose the border from the list;
- Login to be used on the DPI node;
- Prefix for lists on the DPI node (it will be used as the name of service profile on the node);
- Choose bridges of the border;
- Choose Network training to get the addresses of this profile;
- Specify address/networks of the ISP (if necessary).

Click on the button "Save changes" or "Save and Disable/Enable".



After creation the ISP profile is enabled by default. Only enabled profiles are uploaded to DPI nodes.

Editing ISP Profile

In the "ISPS & IGWS Profiles" section → "ISPs list" click on the button "Edit Profile".

A modal form for creating/editing ISP profile will pop up; make the changes you need and click on the "Save changes" or "Save and Disable/Enable" button.

Deleting ISP Profile


In the "ISPS & IGWS Profiles" section → "ISPs List" click on the "Delete" button and confirm/cancel the action.



Attention: Before deleting the profile, make sure there are no rules referring to this profile!

Policing Profile

Change to the "Applications and Policings" profile → "Policings Profiles".

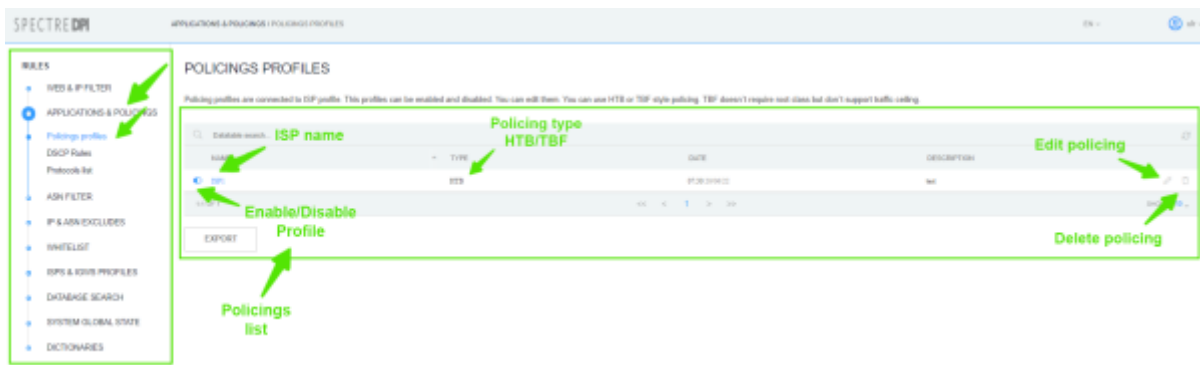

Editing Policing Profile

Click on the "Edit policing" button.

EDIT APPLICATION POLICING PROFILE #1

Policing profiles are connected to ISP profile. This profiles can be enabled and disabled. You can edit them. You can use HTB or TBF style policing. TBF doesn't require root class but don't support traffic ceiling.

Profile name: ISP1 (Enabled)

ISP profile configuration

Description: test

Policing type: HTB [AUTOFILL]

Inbound profile:

INBOUND RATE	UNIT	CEIL	UNIT	ENABLE		
110	Mbps	0	Eps	☐		
CS0 RATE	0	UNIT	CS0 CEIL	110	UNIT	Static
CS1 RATE	0	UNIT	CS1 CEIL	110	UNIT	Static
CS2 RATE	0	UNIT	CS2 CEIL	110	UNIT	Static
CS3 RATE	0	UNIT	CS3 CEIL	110	UNIT	Static
CS4 RATE	0	UNIT	CS4 CEIL	110	UNIT	Static
CS5 RATE	0	UNIT	CS5 CEIL	110	UNIT	Static

Applications CS0 list
Applications CS1 list
Applications CS2 list
Applications CS3 list
Applications CS4 list
Applications CS5 list

In the popup editing form:

- Enter policing description;
- Choose policing type TBF/HTB (form with class values will look different depending on the type selected)



You can use configuration autocomplete:

- For HTB type: rate=8Bps, ceil=value that was specified in autocomplete form;
- For TBF type: rate=value that was specified in autocomplete form.

To save the changes click on the button "Save profile" or "Save and disable/enable".



Thy policing profile is disabled by default.

Deleting Policing Profile

There are two ways to delete the profile: by clicking "Delete profile" button in the list of policing profiles or the same button on Editing Profile page.

WEB and IP Filter

Locking Rules List

Change to the "WEB and IP Filter" section.

WEB & IP FILTER

Number of blocked resources (by type)

TYPE	ACTIVE	DISABLED	TOTAL
CDN	4	0	4
SSL	4	0	4

List of blocked resources

Last entries in WebIP register

STATUS	IP	DATE	TYPE	RESOURCE NAME	RESOURCE VALIDATED	REGULATOR	REASON
Blocked	1	11.08.2019 17:17	SSL	malware	*malware	RSG-1	Tam
Blocked	1	11.08.2019 17:17	SSL	malware	*malware	RSG-1	Tam
Blocked	1	11.08.2019 17:17	CDN	malware	*malware	RSG-1	Tam
Blocked	1	11.08.2019 17:17	CDN	malware	*malware	RSG-1	Tam
Blocked	1	11.08.2019 17:17	CDN	malware	*malware	RSG-1	Tam
Blocked	1	11.08.2019 17:17	SSL	malware	*malware	RSG-1	Tam
Blocked	1	11.08.2019 17:17	SSL	malware	*malware	RSG-1	Tam

Edit rule

Creating/Editing Locking Rules

- To create new locking rule for a resource, change to the "WEB and IP Filter" section → "Add new rule";
- To edit an existing rule change to the "WEB and IP Filter" section and click on "Edit rule" button.

In the popup form:

- Choose the regulator;
- Choose the category;
- Enter rule public description;
- Enter rule hidden description;

ADD RULE #NEW

Rule ID: 0

Resource: REG 111

Category: CAT 111

Public Description: Public Description

Internal Description: Internal Description

Resource

Select type of resource and put the URL, SNI, CN, IP, IP:PORT or CIDR in this field.

Resource: facebook.com

Type: URL

VALIDATE

Validation result: This is SSL/TLS resource. We can block FULL DOMAIN! Next SNI and CN will be added to the list: SNI: facebook.com, SNI: *.facebook.com, CN: facebook.com, CN: *.facebook.com

ADD TO LIST

IMPORT FROM FILE

In the resource validation form, enter the resource and choose its type:

- If it is not necessary to validate the resource, just click on "Add to the list" button;
- Click on the "Check" button. Information about the resource will be displayed. It can be added to the rule locking list. To do this, click the "Add to List" button.

List of resources

TYPE	RESOURCE ANY	RESOURCE VALIDATED	STATUS	Delete resource
SSL	facebook.com	*.facebook.com	VALID	
SSL	facebook.com	facebook.com	VALID	
CN	facebook.com	*.facebook.com	VALID	
CN	facebook.com	facebook.com	VALID	

CLEAR ALL

Apply the rule to ISPs from the list

Select ISP which the rule will be applied

☐ ISP1

SELECT ALL

UNSELECT ALL

Applying the rule to ISP profile

Actions log

DATE	USER	ACTION	NEW VALUE	OLD VALUE
Data not found				

SAVE CHANGES

SAVE AND DISABLE

In the subsection for binding rules to ISP profiles:

- If the option "Apply the rule to ISP from the list" is **disabled**, such rule will be global. Resources from this rule will be included in the global lists of blocked resources.
- If the option "Apply the rule to ISP from the list" is **enabled**, such rule will be applied only to those ISP profiles, which are noted in this rule. Resources from this rule will be included in the locking lists for these ISP profiles.

Deleting the Locking Rule

Change to the "WEB and IP Filter" section and click on the "Edit the rule" button.

Select type of resource and put the URL, SNL, CN, IP, IP:PORT or CIDR to this field.

Resource: Type:

List of resources

TYPE	RESOURCE NAME	RESOURCE VALUATED	STATUS
❏ CI	facebook.com	facebook.com	Valid
❏ CI	facebook.com	*facebook.com	Valid
❏ IDC	facebook.com	facebook.com	Valid
❏ IDC	facebook.com	*facebook.com	Valid

☐ Apply the rule to ISPs from the list The rule will be applied for all ISPs by default.

Actions log

DATE	USER	ACTION	NEW VALUE	OLD VALUE
11.23.2019.01.21	ad	The rule created		

Delete rule (green arrow pointing to the DELETE RULE button)



Attention: Before deleting a rule, make sure it does not refer to any ISP profile.

Domain Check

Change to the "WEB and IP Filter" section → "Check domain".

SPECTRE DPI WEB & IP FILTER | CHECK DOMAIN

DOMAINS

- WEB & IP FILTER
- ADD NEW RULE
- CHECK DOMAIN
- SEARCH DATABASE
- APPLICATIONS & POLICIES
- ASN FILTER
- IP & ASN EXCLUSIONS
- WHITELIST
- ISPs & ISPs PROFILES
- DATABASE SEARCH
- SYSTEM GLOBAL STATE
- DICTIONARIES

CHECK DOMAIN

Enter IP or URL with http/https prefix to check resource create correct rule

Resource check:

Domain check form (green arrow pointing to the CHECK button)

In the "Resource Check" field type in the URL of resource to be checked. Then click on the "Check" button. Information about the specified resource will be displayed below the form:

- SSL/TLS, locking type;
- Certificate information;
- DNS list;
- Recommendations about the values to use to lock this resource.

Enter IP or URL, with <https://> prefix to check resource exists named rule

This is [SSL/TLS](#)-resource. Type of block is [FULL DOMAIN](#)


Certificate info

DNS info			
TYPE	DOMAIN/NAME	ADDRESS	TTL
A	900.com	191.216.84.81	300
A	900.com	191.216.128.81	300
A	900.com	191.216.0.80	300
A	900.com	191.216.160.81	300
NS	900.com	ns1.900.com.sg	600
NS	900.com	ns2.900.com.sg	600
NS	900.com	ns3.900.com	600
NS	900.com	ns4.900.com	600
MX	900.com	chinese1.messagingcloud.com	300
MX	900.com	chinese2.messagingcloud.com	300
DNS recursion: No			

DNS list

Recommendations for resource locking


As a result, all blocking rules that match the selected search parameters will be displayed.

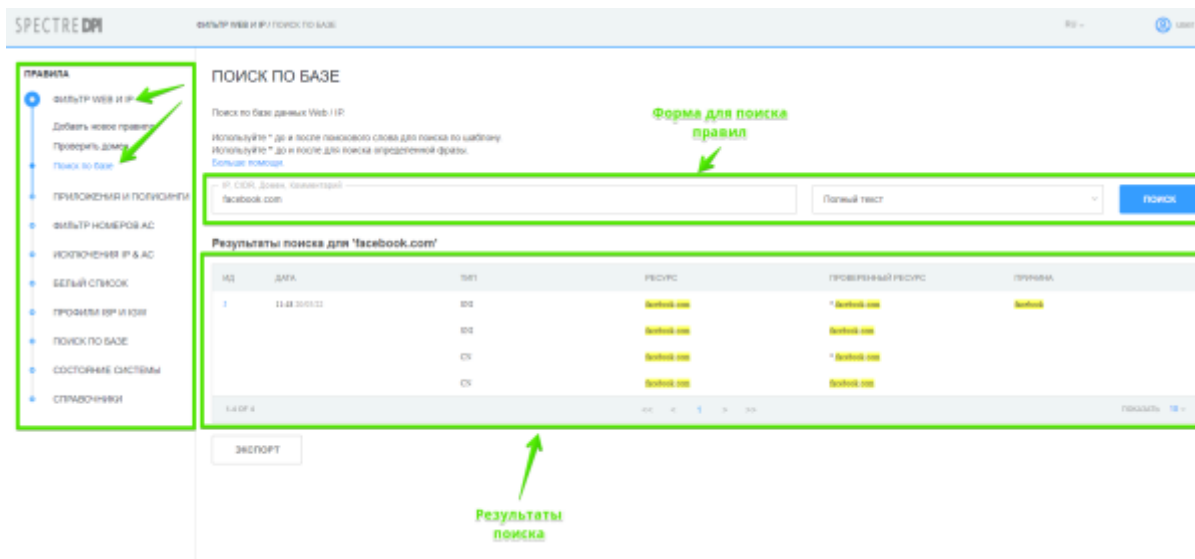

Whitelist

Whitelist rule list

Change to the "Whitelist" section.

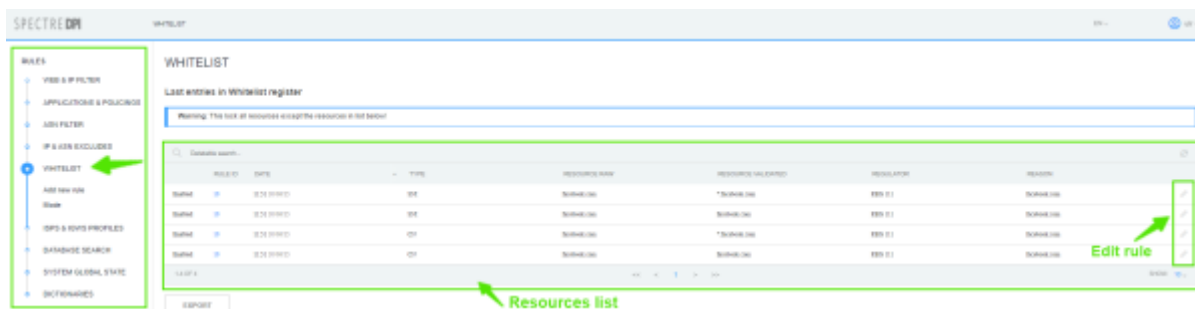

Creating/Editing the white list

- To create a new white list rule change to the "Whitelist" section → "Add new rule";
- To edit an existing rule change to the "White list" section and click on the "Edit rule" button.

In the popup form:

- Choose the regulator;
- Choose the category;
- Enter rule public description;
- Enter rule hidden description;

ADD RULE #NEW

Warning: This list of resources restricts the resources in the list below

Rule ID:

Name: Category:

Description:

Resource validation

Resource

Select type of resource and put the URL, DNS, CIDR, or IP PORT as CIDR in the field

Resource: Type:

Validation result

Validation result: This is a valid resource. The user listed FULL DISALLOW. Based on the URL and CIDR will be added to the list.

In the resource validation form, enter the resource and choose its type:

- If it is not necessary to validate the resource, just click on “Add to the list” button;
- Click on the “Check” button. Information about the resource will be displayed. It can be added to the rule locking list. To do this, click the “Add to List” button.

List of resources

TYPE	RESOURCE NAME	RESOURCE VALIDATED	STATUS
☒ DNS	facebook.com	*facebook.com	100%
☒ DNS	facebook.com	facebook.com	100%
☒ DNS	facebook.com	*facebook.com	100%
☒ DNS	facebook.com	facebook.com	100%

☒ **Apply the rule to ISPs from the list**

Select ISP which the rule will be applied

☒ ISP1

Resources list

Applying the rule to ISP profile

Actions log

DATE	USER	ACTION	NEW VALUE	OLD VALUE
2023-10-10 10:10	me	The rule created		

In the subsection for binding rules to ISP profiles:

- If the option “Apply the rule to ISP from the list” is **disabled**, such rule will be global. Resources from this rule will be included in the global lists of blocked resources.
- If the option “Apply the rule to ISP from the list” is **enabled**, such rule will be applied only to those ISP profiles, which are noted in this rule. Resources from this rule will be included in the locking lists for these ISP profiles.

Deleting a white list rule

Change to the “Whitelist” section and click on the “Edit the rule” button.

Resource

Select type of resource and put the URL, DNS, CIDR, IP, IP-PORT or CIDR to this field.

Resource: Type:

List of resources

TYPE	RESOURCE NAME	RESOURCE ALIASES	STATUS
IP	Resource.com	Resource.com	1000
IP	Resource.com	*Resource.com	1000
IP	Resource.com	Resource.com	1000
IP	Resource.com	*Resource.com	1000

☐ Apply the rule to ISPs from the list. The rule will be applied for all ISPs by default.

Actions log

DATE	USER	ACTION	NEW VALUE	STATUS
12.12.2017	id	Disable rule		

1 / 1 OF 1

Delete rule



Attention: Before deleting a rule, make sure it does not refer to any ISP profile.

Whitelist operating mode management

Change to the "Whitelist" section → "Mode".

SPECTRE DPI

WHITELIST / MODE

Global Whitelist

Set mode for Global Whitelist. If activated all Whitelist rules marked as global. The Global Whitelist rules applied for all ISPs.

State: ☒ **Enable/Disable whitelist**

Whitelist for ISPs

Set Whitelist mode for ISPs. If enabled for some ISP the Whitelist rules which connected to ISP will be applied.

ISP	WHITELIST
DPI	☒

Enable/Disable whitelist for ISP

- With the global whitelist mode enabled, the whitelist service is applied to all ISP profiles and resource lists are formed only from global whitelist rules;
- When the whitelist mode is enabled for a separate ISP profile, the service is applied only to ISP which has it enabled. The lists are formed only from white list rules which refer to this ISP profile;
- If both mode are enabled, global and separate ISP rules lists are concatenated. For other ISPs, the whitelist service is used with only the global whitelist rules.


Database search (global)

Change to the "Database search" section.

In the "IP, CIDR, Domain, Comment" field enter the value in accordance with the prompts at the top of the page, choose search type: Full Text, By Resources or By Description. Click on "Search" button.

The screenshot displays the Spectre DPM Search Database interface. On the left, a sidebar lists various search filters: VIEW & IP FILTER, APPLICATIONS & SERVICES, ASIN FILTER, IP & ASN CHANGES, VIRTUOLIST, USPS & USPS PROFILES, SYSTEM CLOSING STATE, and DICTIONARIES. The main section, titled 'SEARCH DATABASE', features a search bar with the text 'facebook.com' and a 'Search' button. Below the search bar, a table titled 'Search results for "facebook.com"' displays search results. The table columns are: RULE ID, DATE, TYPE, RESOURCE NAME, RESOURCE VALIDATED, PLAIN TYPE, NAME, and DESCRIPTION. The first result shows a rule ID of 11, a date of 11-01-2018, a type of AS, a resource name of facebook.com, a resource validated status of Validated, a plain type of Top-level Dom, and a description of facebook.com. The interface also includes a 'Filter' button and a 'Search' button.

Change to the "State of the system" section.

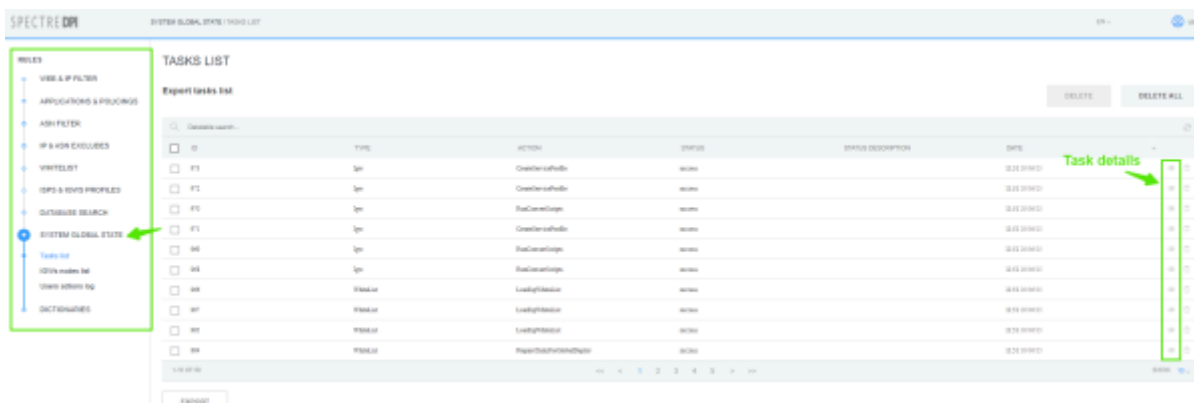

To see the details of the task, click on "Task Details".

The logs for this section are stored in files:

```
/var/www/html/dpiui2/backend/storage/logs/ulr*.log
```



Log detail level is specified with `ULR_LOAD_LOG_LEVEL` option in the `.env` configuration file.