


Содержание

2 Backups	3
Configuration	3

2 Backups


To go to the DB and FS settings section, open the Administrator menu item, section «**Backup settings**».

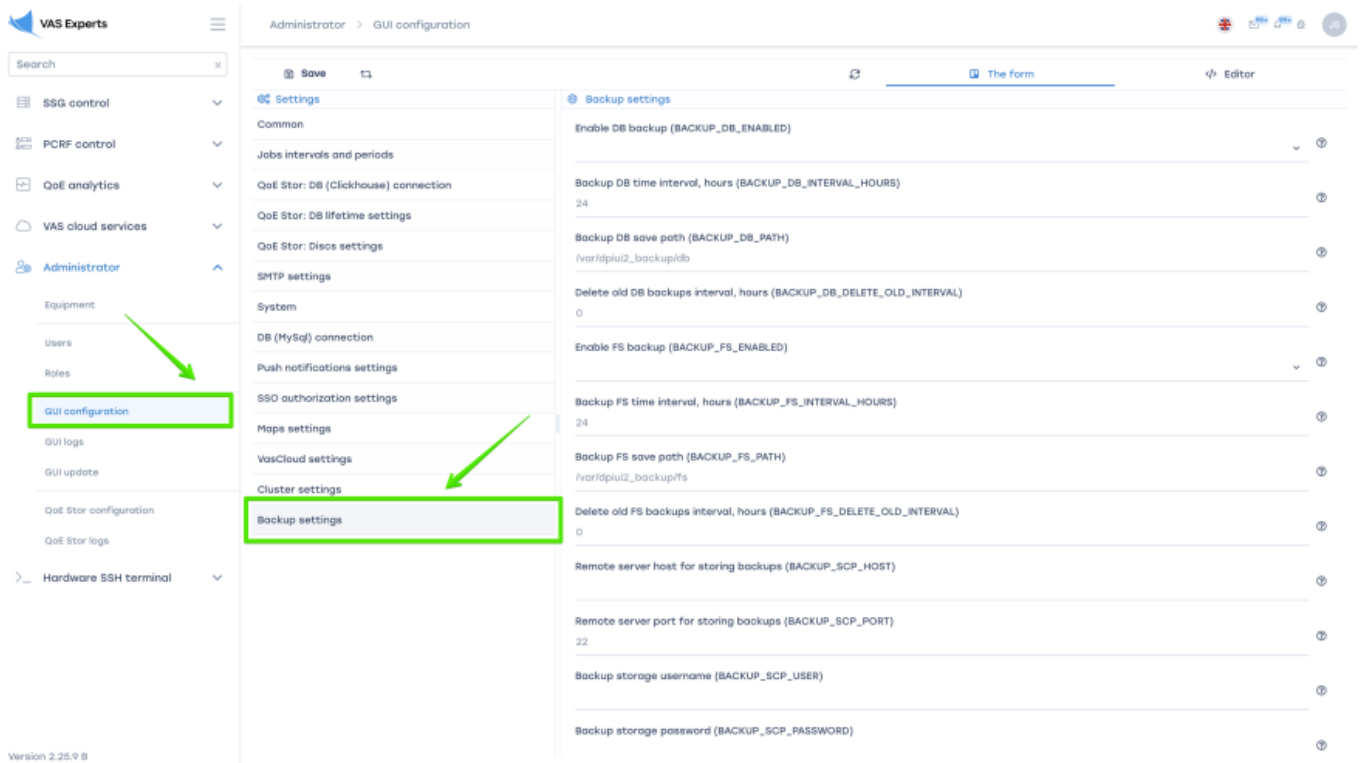

Configuration

Enable DB backup

To enable DB backup, select "**Enabled**".

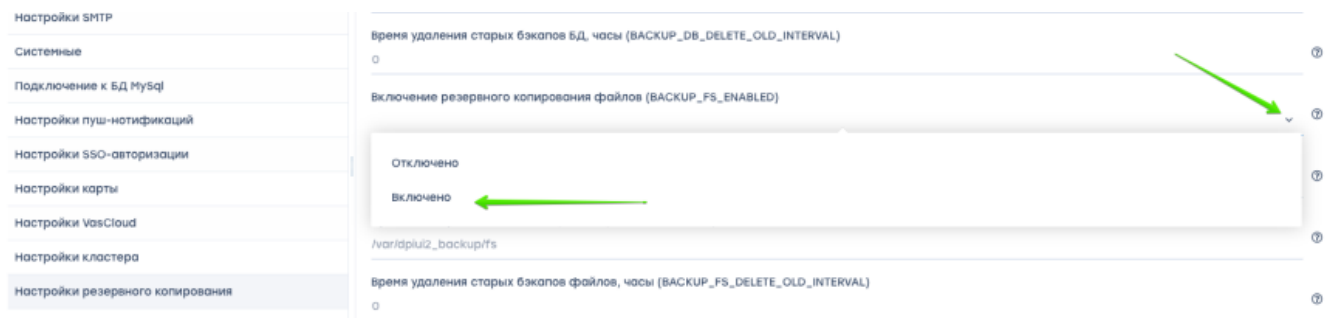

Specify the following settings

- **Backup DB time interval, hours.** (Default value - 24)
- **Backup DB save path.** (Default path: /var/dpiui2_backup/db)

- **Delete old DB backups interval, hours.** (Default value - 0)



When set to "0", old backups will not be deleted.

Enable FS backup



FS backup include **.env** files and folder contents **/var/dpiui2/backend/storage**

To enable FS backup, select **"Enabled"**.

Настройки SMTP

Системные

Подключение к БД MySQL

Настройки пуш-нотификаций

Настройки SSO-авторизации

Настройки карты

Настройки VaaSCloud

Настройки кластера

Настройки резервного копирования

Время удаления старых бэкапов БД, часы (BACKUP_DB_DELETE_OLD_INTERVAL)

0

Включение резервного копирования файлов (BACKUP_FS_ENABLED)

Отключено

Включено

/var/dpiui2_backup/fs

Время удаления старых бэкапов файлов, часы (BACKUP_FS_DELETE_OLD_INTERVAL)

0

Specify the following settings

- **Backup FS time interval, hours.** (Default value - 24)
- **Backup FS save path.** (Default path: /var/dpiui2_backup/fs)
- **Delete old FS backups interval, hours.** (Default value - 0)



>When set to "0", old backups will not be deleted.

Remote server for storing backups settings

- **Remote server host for storing backups.**
- **Remote server port for storing backups.**
- **Backup storage username.**
- **Backup storage password.**



SCP will use key authentication if no password is specified.

- **Backup DB remote path.** (Default path: /var/dpiui2_backup/db)



The folder must exist. The user must have access rights to this folder.

- **Backup FS remote path.** (Default path: /var/dpiui2_backup/fs)



The folder must exist. The user must have access rights to this folder.

Saving changes

To save the edited parameters, click the **"Save"** button.

The screenshot shows a web interface for backup configuration. On the left is a sidebar menu with the following items: "Подключение к БД MySQL", "Настройки пуш-нотификаций", "Настройки SSO-авторизации", "Настройки карты", "Настройки VasCloud", "Настройки кластера", and "Настройки резервного копирования" (which is highlighted). The main content area displays the "Включение резервного копирования файлов (BACKUP_FS_ENABLED)" setting. A dropdown menu is open for this setting, showing two options: "Отключено" and "Включено". A green arrow points from the right towards the dropdown arrow, and another green arrow points from the left towards the "Включено" option. Below the dropdown, the path "/var/dpiui2_backup/fs" is visible. Further down, the "Время удаления старых бэкапов файлов, часы (BACKUP_FS_DELETE_OLD_INTERVAL)" setting is shown with a value of "0".