


Содержание

- 2 Backups 3
- Configuration 3
 - Enable DB backup* 3
 - Enable FS backup* 4
 - Remote server for storing backups settings* 5
 - Saving changes* 5

2 Backups

Move to the DB and FS settings section, open the Administrator menu item, section «**Backup settings**».

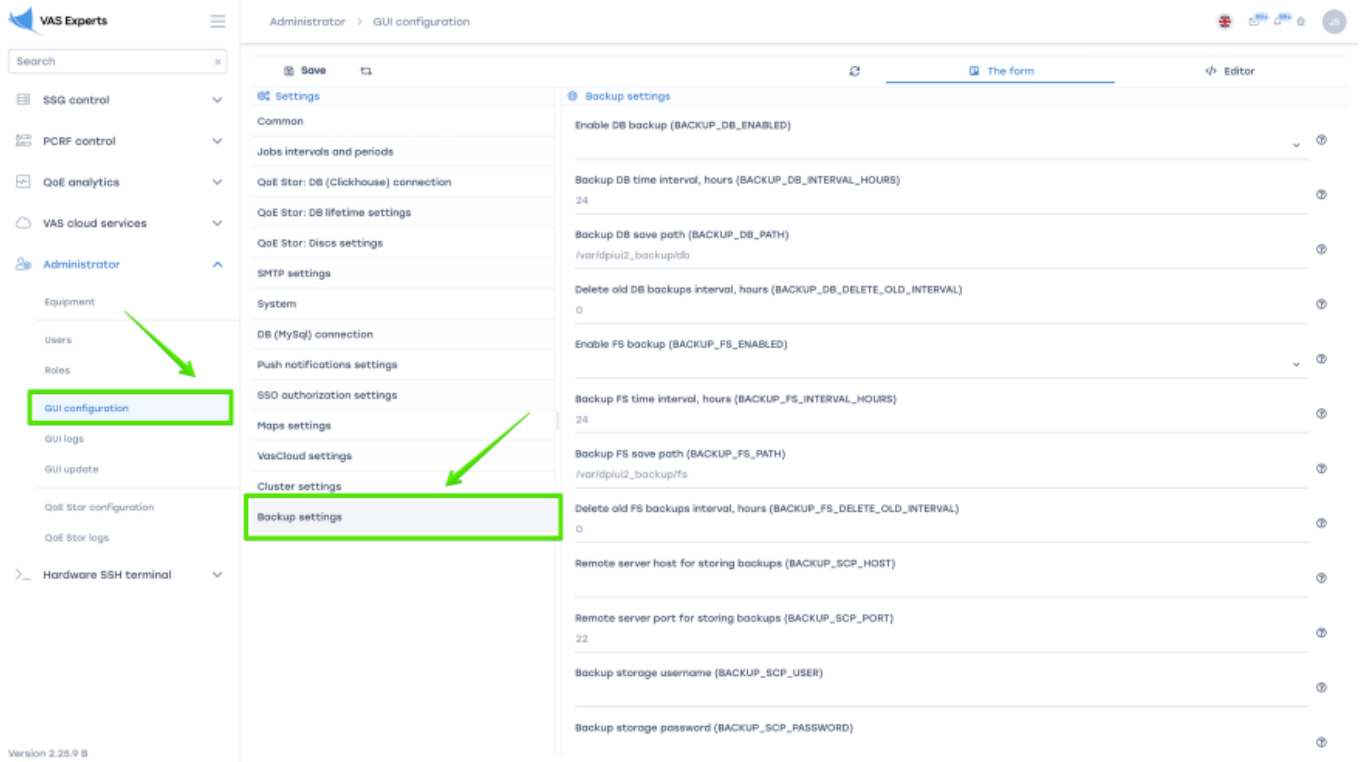

Configuration

Enable DB backup

To enable DB backup, select "**Enabled**".

Settings

Common
Jobs intervals and periods
QoE Stor: DB (Clickhouse) connection
QoE Stor: DB lifetime settings
QoE Stor: Discs settings
SMTP settings
System
DB (MySQL) connection
Push notifications settings
SSO authorization settings
Maps settings
VasCloud settings
Cluster settings
Backup settings

Backup settings

Enable DB backup (BACKUP_DB_ENABLED)

Disabled

Enabled

/var/dpiui2_backup/db

Delete old DB backups interval, hours (BACKUP_DB_DELETE_OLD_INTERVAL)

0

Enable FS backup (BACKUP_FS_ENABLED)

Backup FS time interval, hours (BACKUP_FS_INTERVAL_HOURS)

24

Backup FS save path (BACKUP_FS_PATH)

/var/dpiui2_backup/fs

Delete old FS backups interval, hours (BACKUP_FS_DELETE_OLD_INTERVAL)

0

Specify the following settings

- **BACKUP_DB_ENABLED** - enable DB backup. (Default value - Disabled)
- **BACKUP_DB_INTERVAL_HOURS** - backup DB time interval, hours. (Default value - 24)
- **BACKUP_DB_PATH** - backup DB save path. (Default path: /var/dpiui2_backup/db)
- **BACKUP_DB_DELETE_OLD_INTERVAL** - delete old DB backups interval, hours. (Default value - 0)



When set to "0", old backups will not be deleted.

Enable FS backup



FS backup include **.env** files and folder contents **/var/dpiui2/backend/storage**

To enable FS backup, select "**Enabled**".

QoE Stor: DB lifetime settings

QoE Stor: Discs settings

SMTP settings

System

DB (MySQL) connection

Push notifications settings

SSO authorization settings

Maps settings

VasCloud settings

Cluster settings

Backup settings

Enable FS backup (BACKUP_FS_ENABLED)

Disabled

Enabled

/var/dpiui2_backup/fs

Delete old FS backups interval, hours (BACKUP_FS_DELETE_OLD_INTERVAL)

0

Remote server host for storing backups (BACKUP_SCP_HOST)

Remote server port for storing backups (BACKUP_SCP_PORT)

22

Specify the following settings

- **BACKUP_FS_ENABLED** - **enable FS backup.** (Default value - Disabled)
- **BACKUP_FS_INTERVAL_HOURS** - **backup FS time interval, hours.** (Default value - 24)
- **BACKUP_FS_PATH** - **backup FS save path.** (Default path: /var/dpiui2_backup/fs)
- **BACKUP_FS_DELETE_OLD_INTERVAL** - **delete old FS backups interval, hours.** (Default value - 0)



When set to "0", old backups will not be deleted.

Remote server for storing backups settings

- **BACKUP_SCP_HOST** - **remote server host for storing backups.**
- **BACKUP_SCP_PORT** - **remote server port for storing backups.**
- **BACKUP_SCP_USER** - **backup storage username.**
- **BACKUP_SCP_PASSWORD** - **backup storage password.**



SCP will use key authentication if no password is specified.

- **BACKUP_SCP_DB_PATH** - **backup DB remote path.** (Default path: /var/dpiui2_backup/db)



The folder must exist. The user must have access rights to this folder.

- **BACKUP_SCP_FS_PATH** - **backup FS remote path.** (Default path: /var/dpiui2_backup/fs)



The folder must exist. The user must have access rights to this folder.

Saving changes

To save the edited parameters, click the "**Save**" button.

Search

SSG control

PCRf control

QoE analytics

VAS cloud services

Administrator

Equipment

Users

Roles

GUI configuration

GUI logs

GUI update

QoE Stor configuration

QoE Stor logs

> Hardware SSH terminal

Version 2.25.9.8

Save

t1

Settings

Common

Jobs intervals and periods

QoE Stor: DB (Clickhouse) connection

QoE Stor: DB lifetime settings

QoE Stor: Disks settings

SMTP settings

System

DB (MySQL) connection

Push notifications settings

SSO authorization settings

Maps settings

VasCloud settings

Cluster settings

Backup settings

Backup settings

Enable DB backup (BACKUP_DB_ENABLED)

Backup DB time interval, hours (BACKUP_DB_INTERVAL_HOURS)

24

Backup DB save path (BACKUP_DB_PATH)

/var/dpiu2_backup/db

Delete old DB backups interval, hours (BACKUP_DB_DELETE_OLD_INTERVAL)

0

Enable FS backup (BACKUP_FS_ENABLED)

Backup FS time interval, hours (BACKUP_FS_INTERVAL_HOURS)

24

Backup FS save path (BACKUP_FS_PATH)

/var/dpiu2_backup/ffs

Delete old FS backups interval, hours (BACKUP_FS_DELETE_OLD_INTERVAL)

0

Remote server host for storing backups (BACKUP_SCP_HOST)

Remote server port for storing backups (BACKUP_SCP_PORT)

22

Backup storage username (BACKUP_SCP_USER)

Backup storage password (BACKUP_SCP_PASSWORD)