


# Table of Contents

<b>Cloning a website</b> .....	3
<b>Sites</b> .....	3
Add a subtask .....	3
Add a crawl .....	8
Run scan .....	8
Stop scanning .....	8
Get acquainted with the properties of data folders .....	8
Download archive .....	8
Clear Folder .....	8
Enable Virtual Host .....	9
Turn off the virtual host .....	9
Site Spoofing .....	9
Update the list .....	9
Change List Item .....	9
Delete a list item .....	9
<b>Statistics</b> .....	9



# Cloning a website


To go to the section, click the **LAWFUL INTERCEPTION** menu item, then click the **CLONING A WEBSITE** menu item.

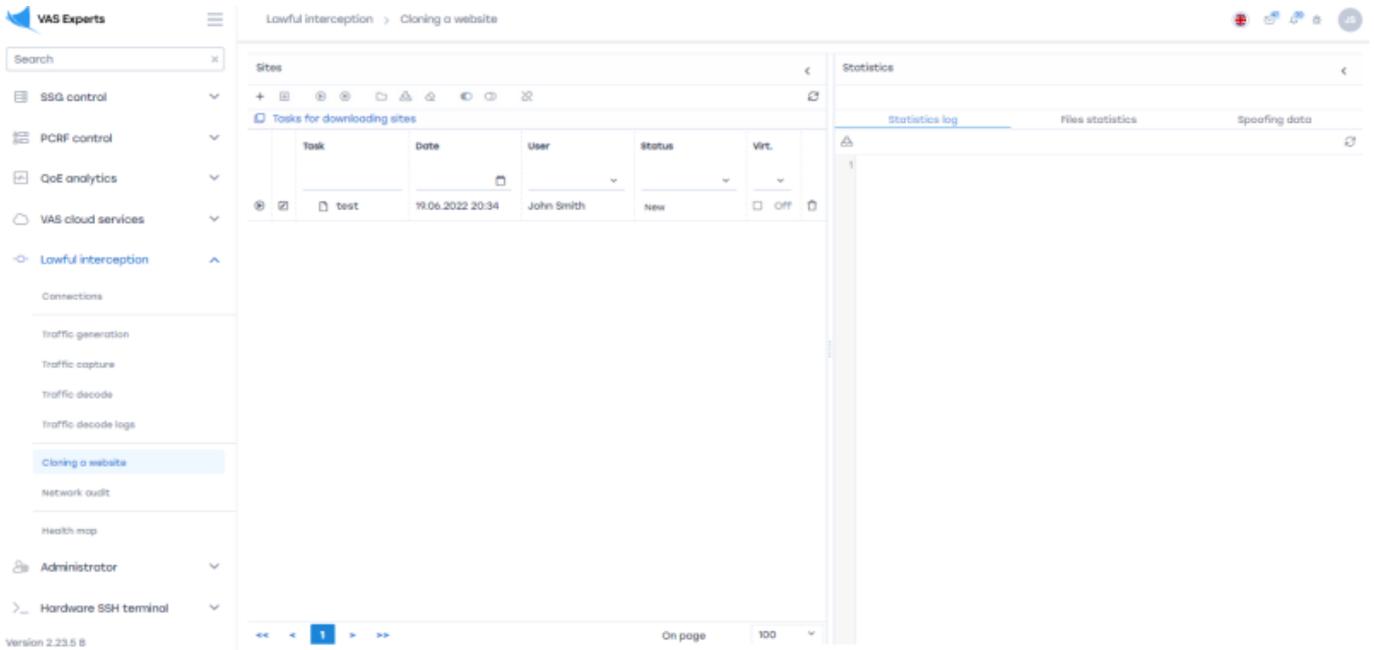

## Sites

### Add a subtask

To add a subtask to the website download "**Add a subtask**".  
In the window that opens, enter the parameters.

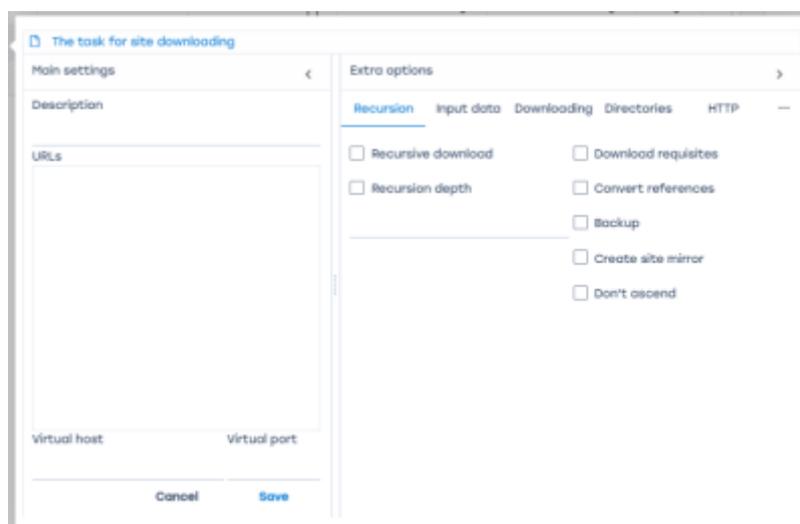

Basic parameters:

1. **Description.** This field contains the name or description of the profile
2. **URL(a).** Url(a) or a list of URLs of files that the user needs to download.
3. **Virtual host address.** The address of the virtual host on which the cloned site will be deployed (URL links).
4. **Virtual host address.** The address of the virtual port on which the cloned site will be deployed (URL links).

#### Additional parameters:

#### Recursion

Recursion Input data Downloading Directories HTTP ...

Recursive download

Recursion depth

Download requisites

Convert references


Backup

Create site mirror

Don't ascend


- **Recursive loading.** If the user needs all the links contained on the cloned site, then it is necessary to check the box in this cell.
- **Recursion depth**
- **Upload banking details.** If the user needs the images needed to load the html site, then it is necessary to check the box in this cell.
- **Convert links.** Make links local in uploaded HTML or CSS.
- **Make a backup.** Creating a copy of a file with расширением.оргд . The ORIG format is used to indicate the original version of a file that is saved as a backup after editing or updating.
- **Create a site mirror.** If the user wants to create a duplicate (copy) of the site, then it is necessary to check the box in this cell. The mirror is a duplicate, a copy of the site.
- **Do not climb.** Do not go up to the parent directory.

#### Input data

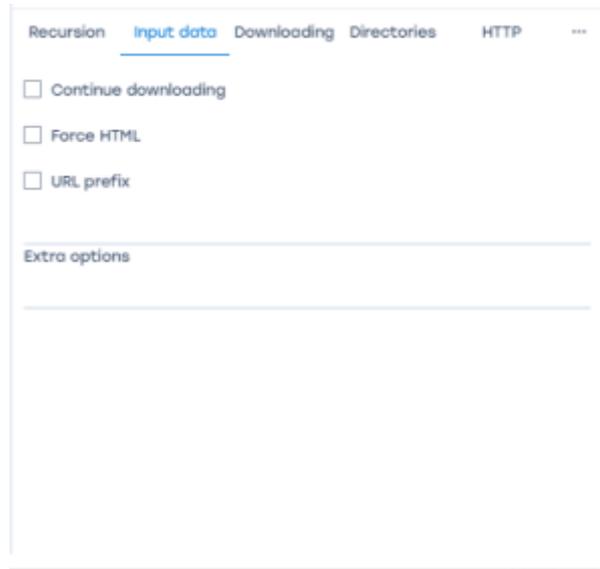

- **Continue downloading.** If the operation was interrupted while downloading files, then you can resume downloading from the place of interruption by checking the continue downloading checkbox.
- **Force HTML**
- **The URL prefix** indicating the protocol used to access the location, i.e. the data transfer protocol.
- **Additional parameters.**

## Download

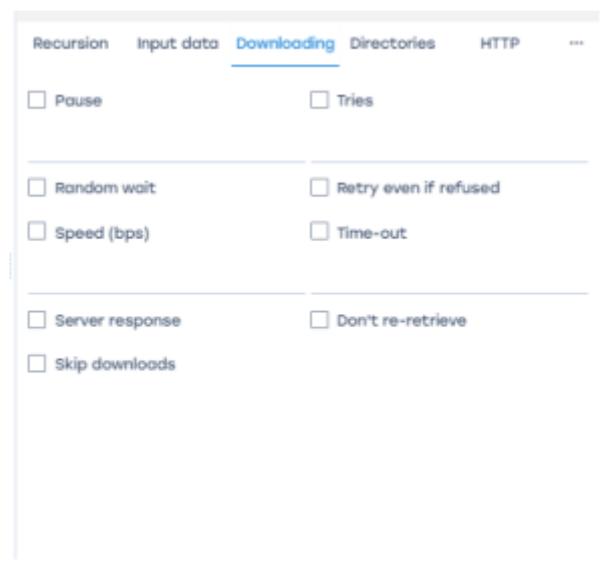


- **Pause.** The user can set a pause before each file download. The duration of the pause is specified by the user independently in seconds.
- **Attempts.** The user can configure the number of repeated attempts to download the file in case it is interrupted. The number of attempts is entered manually by the user.
- **Arbitrary pause.** The user can choose an arbitrary pause before downloading each file. The pause duration is determined randomly in the range from 0.5 to 1.5 seconds.
- **Speed (bits/sec).** If necessary, the download speed can be limited. As a result, this operation will not occupy the entire available data channel and will not affect other processes associated

with the network. You can do this by specifying a speed limit expressed in bytes (as a regular number) per second.


- **Repeat in case of refusal** . Repeat the download even if the connection is denied.
- **Timeout**. File download standby mode. Entered manually by the user in seconds.
- **Response from the server**. Conclusions of the response from the server.
- **Skip downloads**. If a user wants to copy an entire website, but does not need files of a certain type, you can disable their download using the parameter.
- **Do not re-upload**. Do not re-upload files only if they are not newer than the local ones.

## Directories

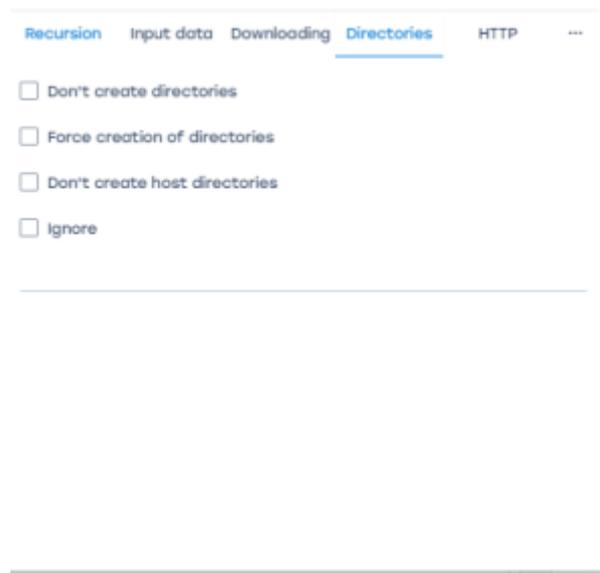


- **Do not create directories.**
- **Force the creation of directories.**
- **Do not create host directories.**
- **Ignore the number of components of the remote directory.**

## FTP

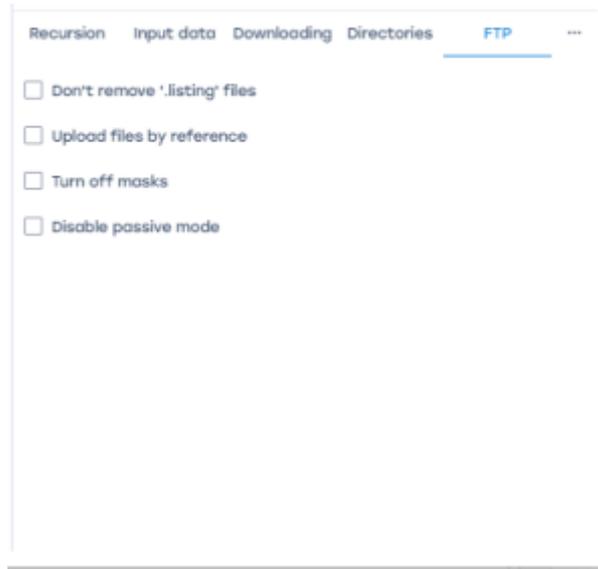

- **Do not delete files.listing**
- **Upload files by links, not directories**
- **Turn off masks**
- **Disable passive mode**

## HTTP

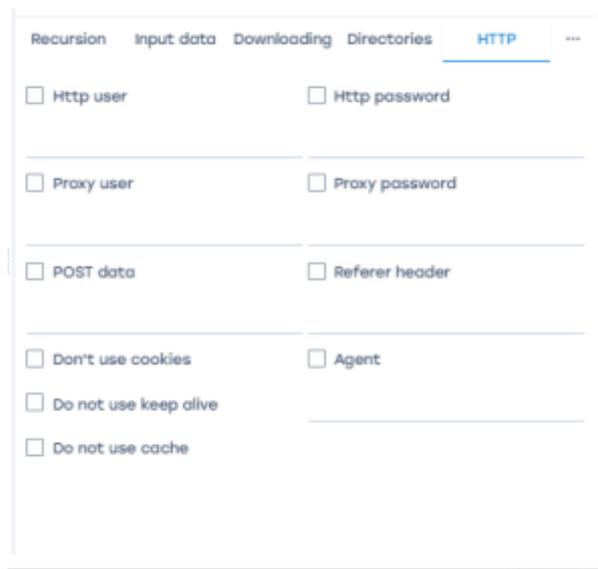

- **HTTP user.** Login input.
- **HTTP password.** Enter the password.
- **Proxy user.** Login input.
- **Proxy password.** Enter the password.
- **POST-lines.** Sending a string as data.
- **Referer header.** The HTTP referer header is transmitted from the browser to the server to tell which page the reader was on before switching to the current one.
- **Do not use cookies.**
- **Do not use keep alive.**
- **Do not use the cache.** Reject data cached by the server.
- **Agent.** Identify yourself as an agent instead of Wget

## Add a crawl

To add a subtask to the website download, click on the button **"Add subtask"**, which is located in the toolbar and do the tasks described above.



## Run scan

To start scanning a profile, select a profile from the list and click on the **"Start scanning"** button.



## Stop scanning

To stop the running profile scan, click on the **"Stop scanning"** button.



## Get acquainted with the properties of data folders

To view the properties of the data folder, click on the "Data Folder Properties" button, after which a window with the folder data will be displayed.




## Download archive

To download the zip archive, click on the "Download" button.



## Clear Folder

To clear the folder with subtasks, click on the "Clear Folder" button.



## Enable Virtual Host

To enable the virtual host of the selected task or subtask, click on the "Enable virtual host" button.



## Turn off the virtual host

To turn off the virtual host of the selected task or subtask, click on the "Turn off virtual host" button.



## Site Spoofing



## Update the list

To update the list of profiles, click on the "**Update**" button.



## Change List Item

To change the profile or subprofile parameters, click on the "**Edit**", which is located to the left of each list item.



## Delete a list item

To delete an item from the list, click on the "**Delete**", which is located to the right of each list item.



## Statistics

This subsection contains information about logical statistics, file statistics - information about the

download of each file, spoofing — information about the final download.