

# Table of Contents

<b>6 Filtering rules management interface</b> .....	3
<b>Universal Locking Rules UI</b> .....	3
<b>Introduction</b> .....	3
<b>Installation</b> .....	3
<b>Configuration</b> .....	3
.env Configuration .....	3
Key Installation .....	4
Roles Management .....	5
Dictionaries Configuration .....	6
IGW Profiles Management .....	10
<b>Web Server for Global Lists Configuration</b> .....	12
Web-server .....	12
<b>DSCP Rules</b> .....	13
<b>ASN Filter</b> .....	14
<b>IP &amp; ASN Excludes</b> .....	16
IP Excludes .....	17
ASN Excludes .....	19
VIP Subscriber Management .....	21
<b>ISP Configuration</b> .....	23
Creating an ISP Profile .....	23
Editing ISP Profile .....	24
Deleting ISP Profile .....	24
Policing Profile .....	25
<b>WEB and IP Filter</b> .....	26
Locking Rules List .....	26
Creating/Editing Locking Rules .....	26
Deleting the Locking Rule .....	27
Domain Check .....	28
Search the Database (among the blocking rules) .....	29
<b>Whitelist</b> .....	30
Whitelist rule list .....	30
Creating/Editing the white list .....	30
Deleting a white list rule .....	31
Whitelist operating mode management .....	32
<b>Database search (global)</b> .....	32
<b>Task monitoring</b> .....	33
<b>Logs</b> .....	33



# 6 Filtering rules management interface

## Universal Locking Rules UI

### Introduction

Universal locking rules (ULR) UI is designed to manage filtering rules on multiple DPIs simultaneously using a graphical interface.

### Installation

Equipment or virtual machines with the following characteristics are suitable for the subsystem:

1. CPU 2.5 GHz, 2-4 cores
2. RAM from 8 GB (mainly for sphinx)
3. Hard drive (HDD) 50 GB - 250 GB
4. Cent OS 7+ operating system (we do not recommend to not install minimal, because most of the dependencies will have to be installed manually)
5. Network Card (NIC) from 10 Mbps



We recommend Cent OS 7+ operating system. **Do not not install minimal, because most of the dependencies will have to be installed manually.** If you need to install software on Cent OS 6, make sure that supervisor 3+ is installed. If you do not have the package, please contact technical support.



The locking rules management interface is a special section of [The VAS Experts DPI Graphical User Management Interface ver.2](#). The installation is similar to the script of [The VAS Experts DPI Graphical User Management Interface ver.2](#).

### Configuration

#### .env Configuration

The subnet configuration is handled with .env file.

```
/var/www/html/dpiui2/backend/.env
```

The file contents:

```
#Redirect URL for "White list" service
ULR_WHITE_LIST_REDIRECT_URL=https://google.com

#The period after Ulr tasks data is deleted (days)
ULR_QUEUE_DELETE_TASKS_DAYS_INTERVAL=1

#ASN for IP-exception rules
ULR_IP_EXCLUDE_ASN=64401

#The host for blocked resources list deployment. To connect the blocked
resources server.
ULR_BLACK_LIST_DEPLOY_HOST=<IP address or host of global locks web-server>

#The port for blocked resources list deployment. To connect the blocked
resources server.
ULR_BLACK_LIST_DEPLOY_PORT=22

#Username for blocked resources list deployment. To connect the blocked
resources server.
ULR_BLACK_LIST_DEPLOY_USER=default

#Password for blocked resources list deployment. To connect the blocked
resources server.
ULR_BLACK_LIST_DEPLOY_PASS=

#To use sudo for blocked resources list deployment. (0 - do not use, 1 -
use)
ULR_BLACK_LIST_DEPLOY_SUDO=1

#Black lists saving path.
ULR_BLACK_LIST_DEPLOY_PATH=/var/www/html/blacklists/

#Log Detail Level (0 - info, 1 - debug, 2 - tracing).
ULR_LOAD_LOG_LEVEL=0
```



After changing the .env file, you need to run the command

```
php /var/www/html/dpiui2/backend/artisan queue:restart
```



These settings can be added to the configuration in the Administrator → DPIUI2 Server Configuration section in the The VAS Experts DPI Graphical User Interface ver.2.

## Key Installation

To use the Universal Locking Rules UI, you need to activate the ULR-license in DPIUI2 with a command:

```
dpiui2 ulr_lic --make=1
```

Next:

1. Enter license level: standard
2. Enter the license completion date in the Y-m-d format (e.g. 2099-12-31)
3. Enter the license password.

If the data is correct, a success message will be displayed:

```
dpiui2 ulr_lic --make=1
Enter level:
> standard


Enter expire date in Y-m-d format:
> 2099-12-31

Enter password:
>

stdClass Object
(
    [success] => 1
)
```

## Roles Management

In the DPIUI2 interface visit the Administrator → Roles section. Create a new role and set read and write permissions in the ulr\_admin section:

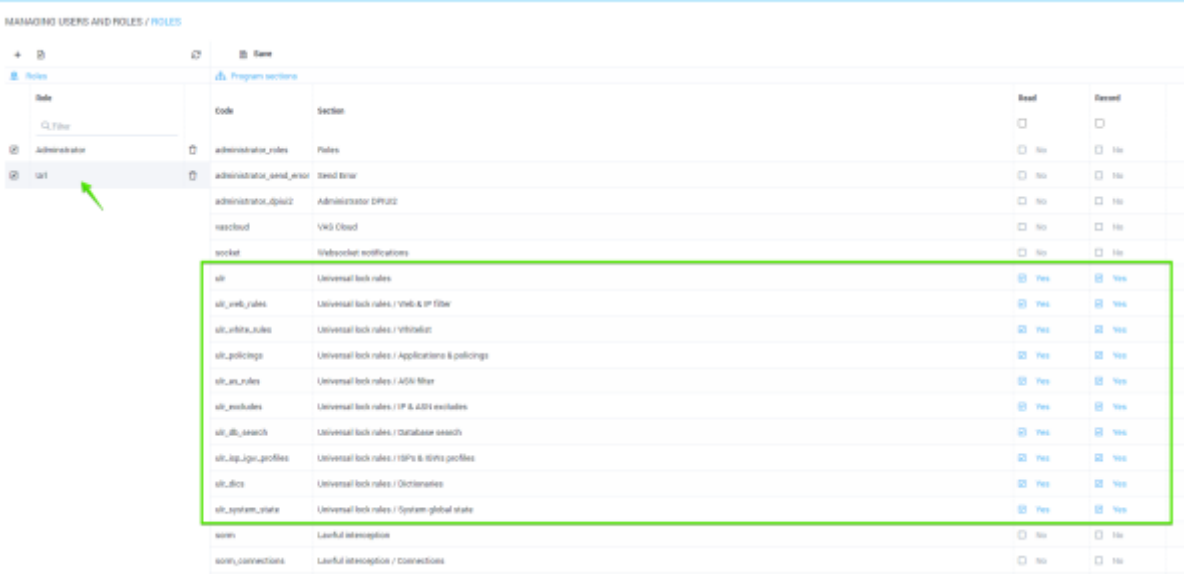

Code	Section	Read	Write
administrator_roles	Roles	<input type="checkbox"/>	<input type="checkbox"/>
administrator_send_email	Send Email	<input type="checkbox"/>	<input type="checkbox"/>
administrator_dpiui2	Administrator DPIUI2	<input type="checkbox"/>	<input type="checkbox"/>
nascloud	VNF Cloud	<input type="checkbox"/>	<input type="checkbox"/>
socket	Websocket notifications	<input type="checkbox"/>	<input type="checkbox"/>
ulr	Universal lock rules	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_web_rules	Universal lock rules / Web & IP Filter	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_auth_rules	Universal lock rules / Whitelist	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_policies	Universal lock rules / Applications & policies	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_dns_rules	Universal lock rules / DNS filter	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_excludes	Universal lock rules / IP & ASN excludes	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_db_search	Universal lock rules / Database search	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_ip_geo_profiles	Universal lock rules / ISPs & ISPs profiles	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_dico	Universal lock rules / Dictionaries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
ulr_system_state	Universal lock rules / System global state	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
snmp	Lawful interception	<input type="checkbox"/>	<input type="checkbox"/>
snmp_connections	Lawful interception / Connections	<input type="checkbox"/>	<input type="checkbox"/>

Next, go to the Administrator → Users section. Create a new user and set him the role that you created earlier.

User name \*

ulr\_user

---

Full name \*

user

---

E-mail \*

user@user.com

---

Phone \*

+796023...

---

Company \*

vasexperts

---

Position \*

ulr

---

Role

Url ▼

---

New password

---

Confirm password

---

Save

After the user logs in, he is moved to the locking rules management section.

SPECTRE DPI WEB & IP FILTER EN LOG

**RULES**

- WEB & IP FILTER
  - Add new rule
  - Check status
  - Search database
- APPLICATIONS & POLICIES
- ASN FILTER
- IP & ASN EXCLUDES
- WHITELIST
- ISPS & IGMP PROFILES
- DATABASE SEARCH
- SYSTEM GLOBAL STATE
- DICTIONARIES

**WEB & IP FILTER**

WebIP firewall summary

TYPE	ACTIVE	DISABLED	TOTAL
CS	4	0	4
SD	4	0	4

Last entries in WebIP register

SEARCH	RULE	DATE	TYPE	RESOURCE NAME	RESOURCE VALIDATED	REGULATOR	REASON
Enabled	1	11.09.2016:17	SD	mail.ru	*mail.ru	ISS 1	Test
Enabled	1	11.09.2016:17	SD	mail.ru	mail.ru	ISS 1	Test
Enabled	1	11.09.2016:17	CS	mail.ru	*mail.ru	ISS 1	Test
Enabled	1	11.09.2016:17	CS	mail.ru	mail.ru	ISS 1	Test
Enabled	1	11.09.2016:17	CS	ya.ru	ya.ru.ru	ISS 1	Test
Enabled	1	11.09.2016:17	CS	ya.ru	*ya.ru.ru	ISS 1	Test
Enabled	1	11.09.2016:17	SD	ya.ru	ya.ru	ISS 1	Test
Enabled	1	11.09.2016:17	SD	ya.ru	*ya.ru	ISS 1	Test

14 OF 9 « < 1 > » show 10

EXPORT

## Dictionary Configuration

- Category Dictionary
- Regulators Dictionary



These dictionaries are used for creating/editing locking rules.

## Category Dictionary

In the Locking Rules management interface go to the Dictionaries → Categories section.

The screenshot shows the SPECTRE DPM interface. The top navigation bar includes 'SPECTRE DPM' and 'DICTIONARIES - CATEGORIES'. The left sidebar lists various rule categories, with 'Dictionaries' selected and 'Categories' highlighted. The main content area features a form for adding a new category item, with fields for 'Item name' and 'Public description', and an 'ADD ITEM' button. Below the form is a table with columns for 'NAME', 'DATE', and 'DESCRIPTION'. The table contains one entry: 'CAT 111', '2023-09-20', and 'REGULATORS'. There is an 'EXPORT' button at the bottom left of the table area.


### Creating

Fill in the form with category name and description and click the "Add" button.

The screenshot shows a close-up of the 'Add new item' form in the 'CATEGORIES' section. The form has two input fields: 'Item name' (containing 'Category') and 'Public description' (containing 'Description'). A blue 'ADD ITEM' button is at the bottom. Green arrows point to each field and the button.


### Editing

To edit: click on the category editing button in the categories table. In the form, change the name and/or description of the category, then click the "Save" button.

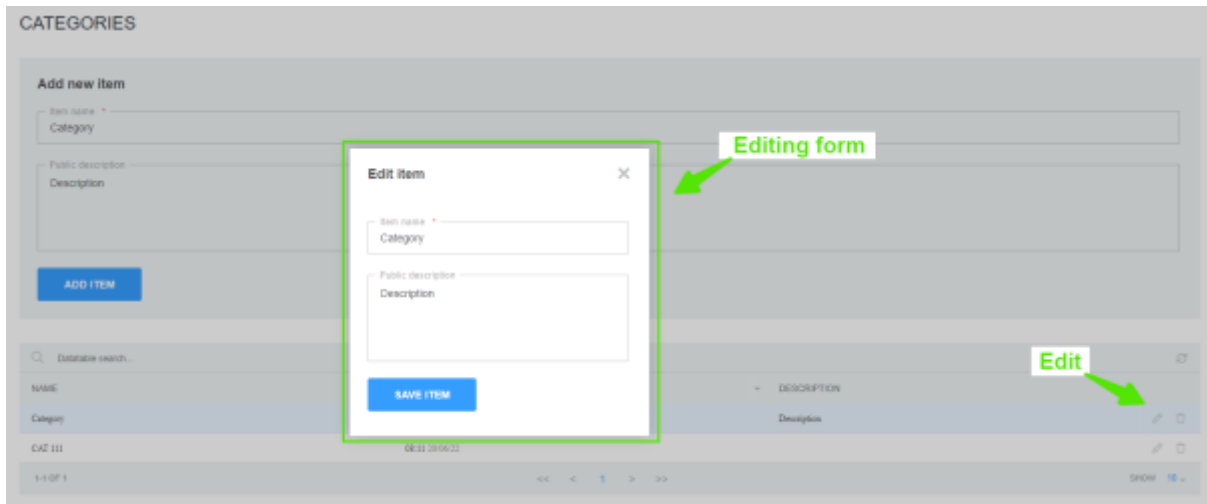

## Deleting


Click on the delete category button in the categories table. In the pop-up window confirm or cancel the action.

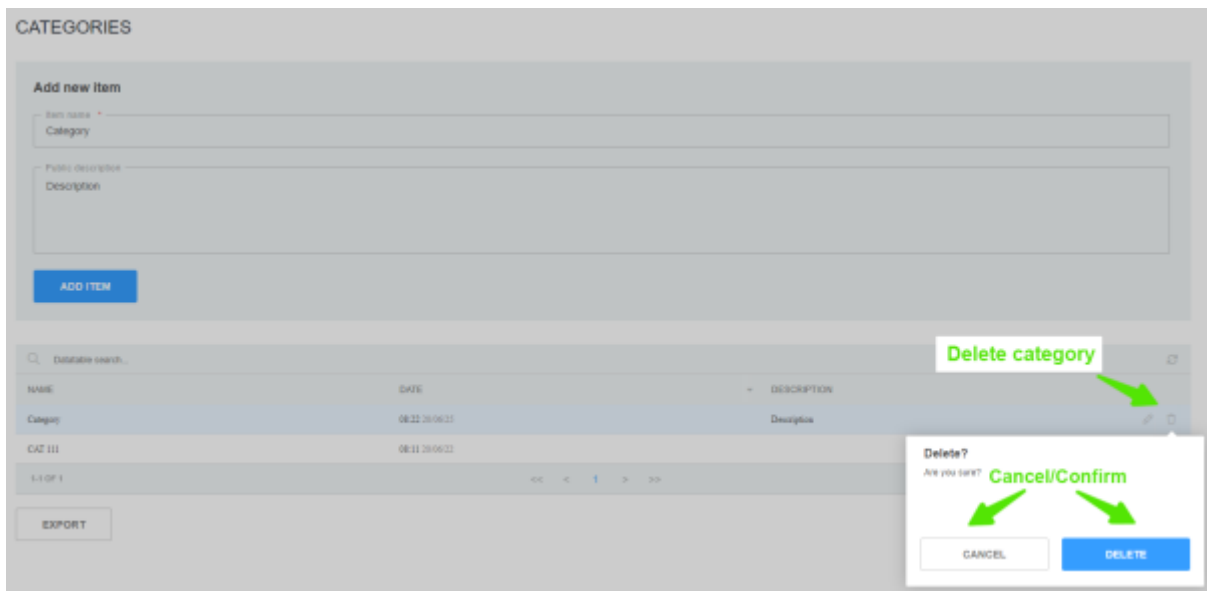

**Attention:** Before deleting a category, make sure there are no rules referring to this category!


## Regulators Dictionary

In the Locking Rules management interface go to the Dictionaries → Regulators section.

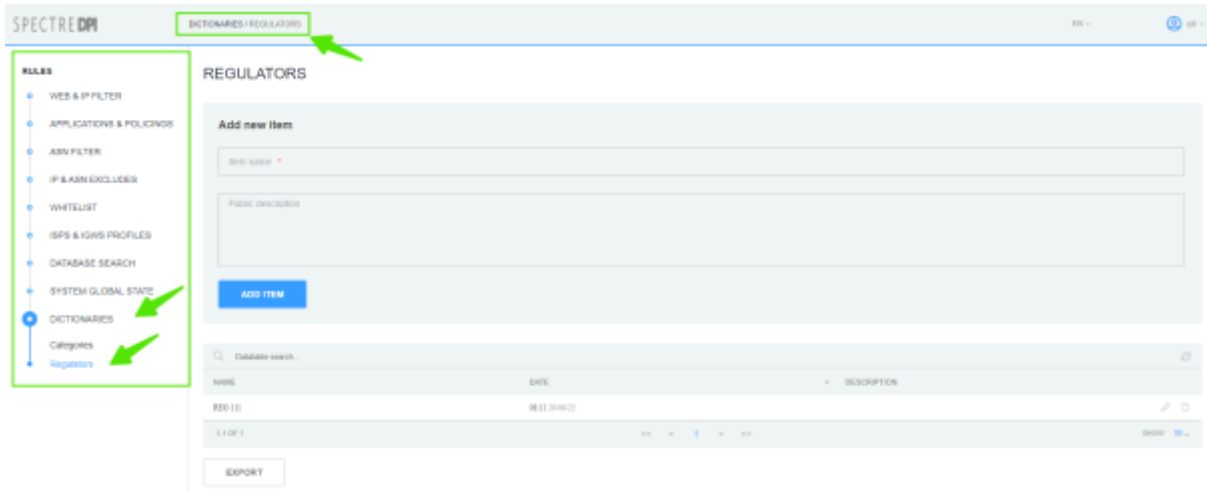


## Creating

Fill in the form with regulator name and description and click the "Add" button.

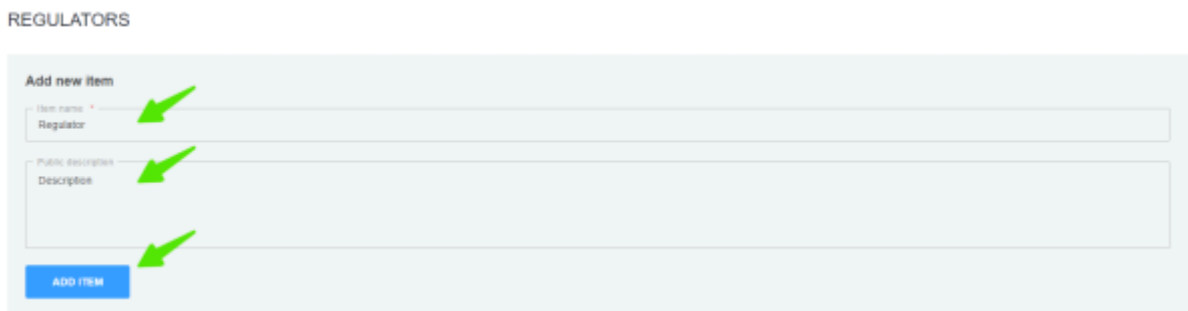


## Editing

To edit: click on the regulator editing button in the regulators table. In the form, change the name and/or description of the regulator, then click the "Save" button.

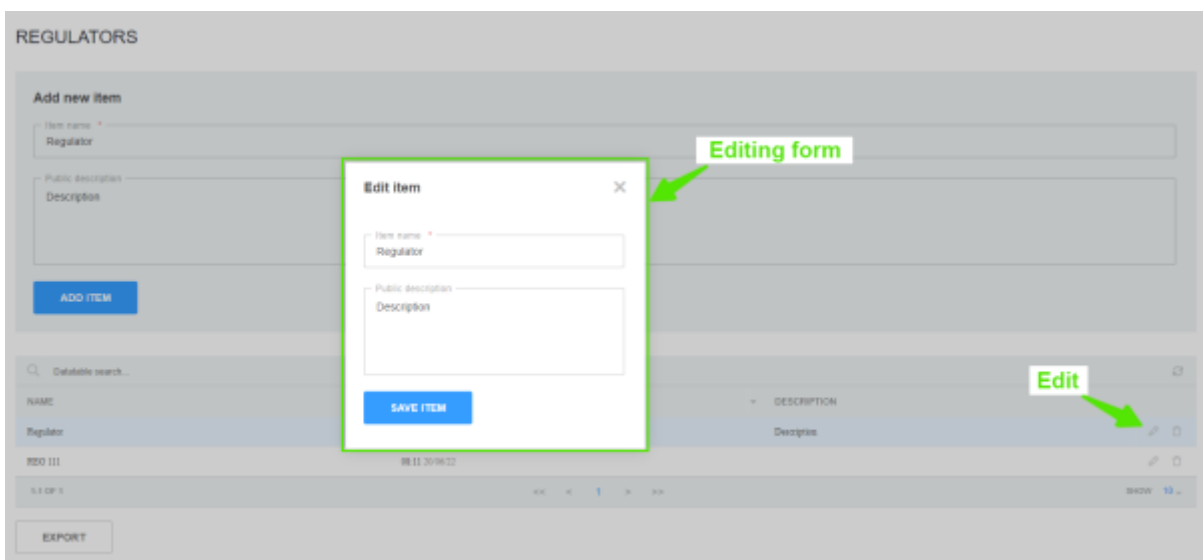

## Deleting


Click on the delete regulator button in the categories table. In the pop-up window confirm or cancel the action.

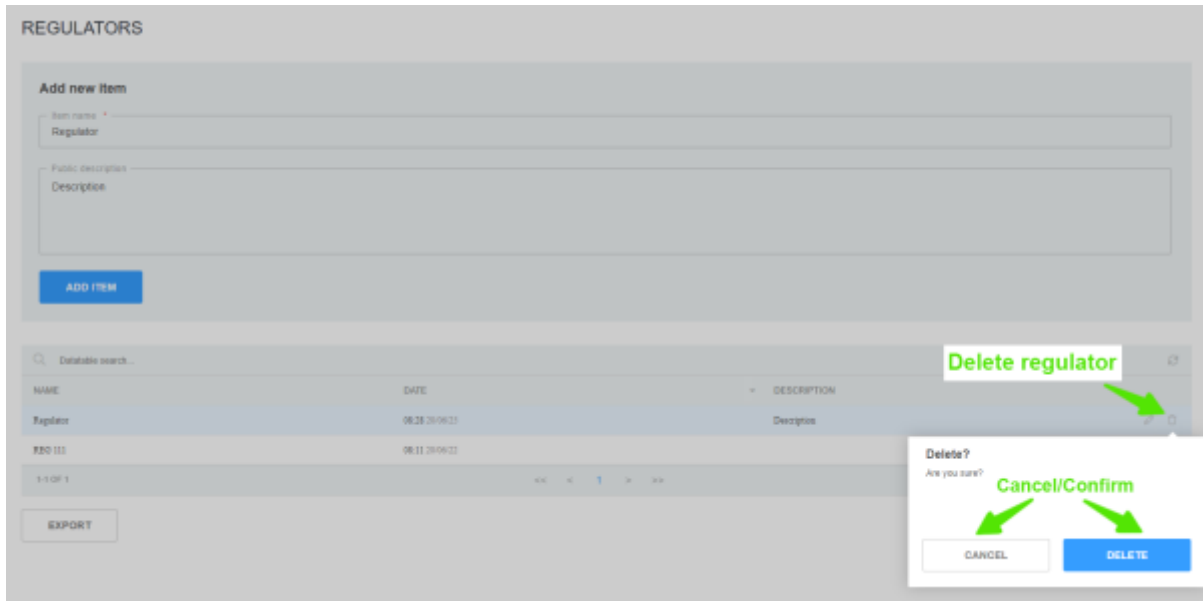

**Attention:** Before deleting a regulator, make sure there are no rules referring to this regulator!

## IGW Profiles Management

Change to the section "ISPS & IGWS Profiles" → "IGWs List".

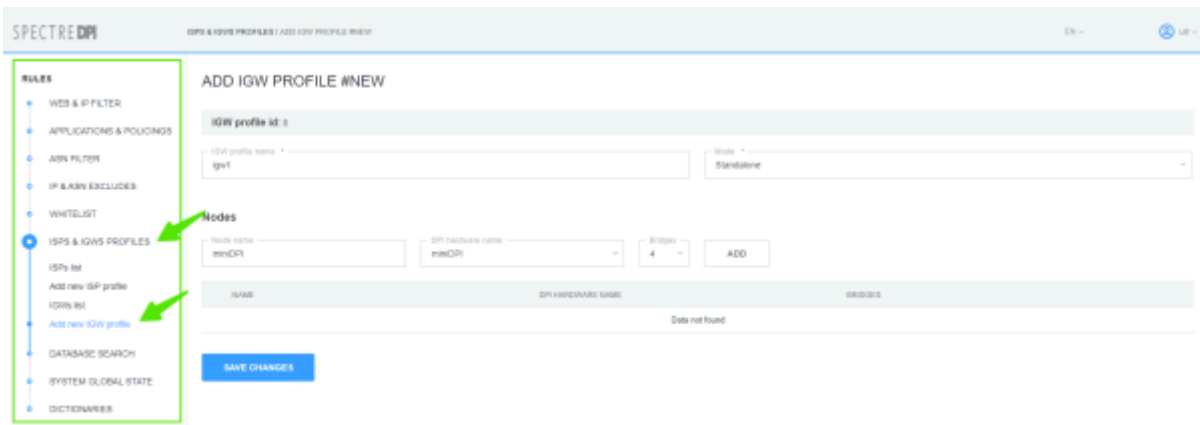

### Creating

To create new IGW profile change to the section "ISPS & IGWS Profiles" → "Add new IGW profile".

In the form specify:

- Profile name;
- Operation mode (Standalone/Cluster)

- Nodes for the profile (Node name, DPI from the list of available equipment and number of bridges)



Before creating IGW profile add FastDPI server in the main section of DPIUI 2 Administrator -> Devices

## Editing

In the "ISPS & IGWS Profiles" → "IGWs List" section click the button "Edit profile".

### IGWS LIST

Select IGW profile from the list

NAME	MODE	DATE	
IGW1111	Standalone	10:16 20:00:19	<a href="#">Edit profile</a>


1-1 OF 1

EXPORT

The IGW profile creation/editing form will open. Make the changes you need and click "Save Changes".

## Deleting

In the "ISPS & IGWS Profiles" → "IGWs List" section click the button "Delete" and confirm/cancel the operation.

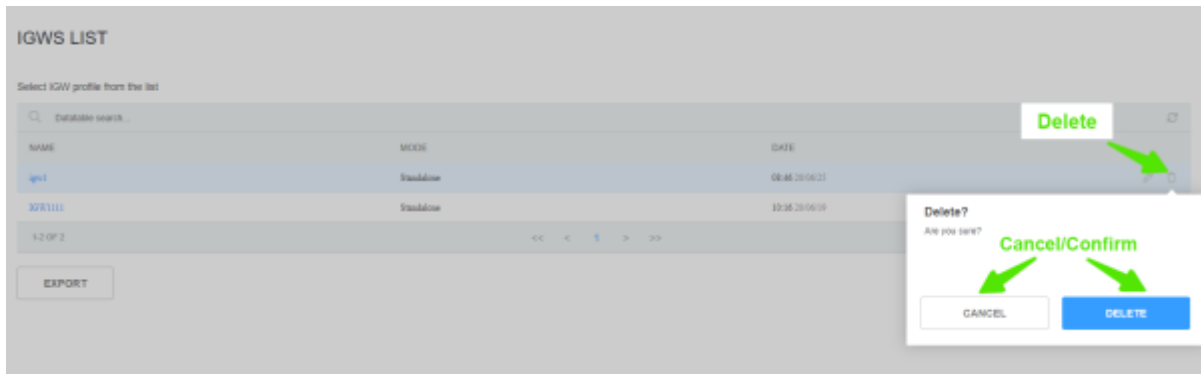

**Attention:** Before deleting a profile, make sure there are no ISP profiles referring to this category!

## Web Server for Global Lists Configuration

### Web-server

1. Prepare a machine with CentOS7+ installed
2. Create a sudo user without password as described in [Dpiui2: DPI connection details](#) section
3. Run the script:

```
rpm --import http://vasexperts.ru/centos/RPM-GPG-KEY-vasexperts.ru
rpm -Uvh http://vasexperts.ru/centos/6/x86_64/vasexperts-repo-1-0.noarch.rpm
yum install dpiutils -y
yum install httpd -y
yum install unzip -y

mkdir /var/www/html/blacklists
chmod -R 777 /var/www/html/blacklists

echo "
<VirtualHost *:80>
    DocumentRoot \"/var/www/html/blacklists\"

    <proxy *>
        Order deny,allow
        Allow from all
    </proxy>
</VirtualHost>
" > /etc/httpd/conf.d/bl_lists.conf

firewall-cmd --permanent --add-port=80/tcp
firewall-cmd --reload
```

```
systemctl enable httpd.service
systemctl restart httpd.service
```

4. In dpiui2 configuration [specify the web-server access parameters in ULR settings section](#)

5. Specify the path to Custom lock list in the settings of all connected FastDPI servers:

```
# URL dictionary for blocking by HTTP (custom_url_black_list)
custom_url_black_list=http://<IP address of Web-server>/blacklist.dict

# Names dictionary for blocking HTTPS protocol by certificate
(custom_cname_black_list)
custom_cname_black_list=http://<IP address of Web-server>/blacklistcn.dict

# IP addresses dictionary for blocking HTTPS by IP (custom_ip_black_list)
custom_ip_black_list=http://<IP address of Web-server>/blacklistip.dict

# Host names dictionary for blocking HTTPS by SNI (custom_sni_black_list)
custom_sni_black_list=http://<IP address of Web-server>/blacklistsni.dict
```

## DSCP Rules

Change to "Applications and policings" section → "DSCP Rules".

The screenshot shows the SPECTRE DPM web interface for managing DSCP Rules. The sidebar on the left has 'APPLICATIONS & POLICINGS' selected. The main area is titled 'DSCP RULES' and contains a 'Rule creating form' with a warning message. Below this is a 'Set priority to protocol' section with input fields for 'Application protocol' (containing 'ADL/DCD') and 'Priority' (set to '50'). A 'SET DSCP' button is present. At the bottom, a table lists existing rules, with one rule 'ADL/DCD' having a priority of '50'. Action buttons for 'Enable/Disable rule', 'Edit rule', and 'Delete rule' are shown for the selected rule.

### Creating


In the form of rule creating:

- Enter the name of application protocol and choose one from the list;
- Choose the priority from the list.

Save the rule by clicking on "Set DSCP" button.


### Editing

In the list of DSCP rules click on "Edit rule" button. In the popup editing form set the necessary priority and save changes by clicking on "Set DSCP" button.

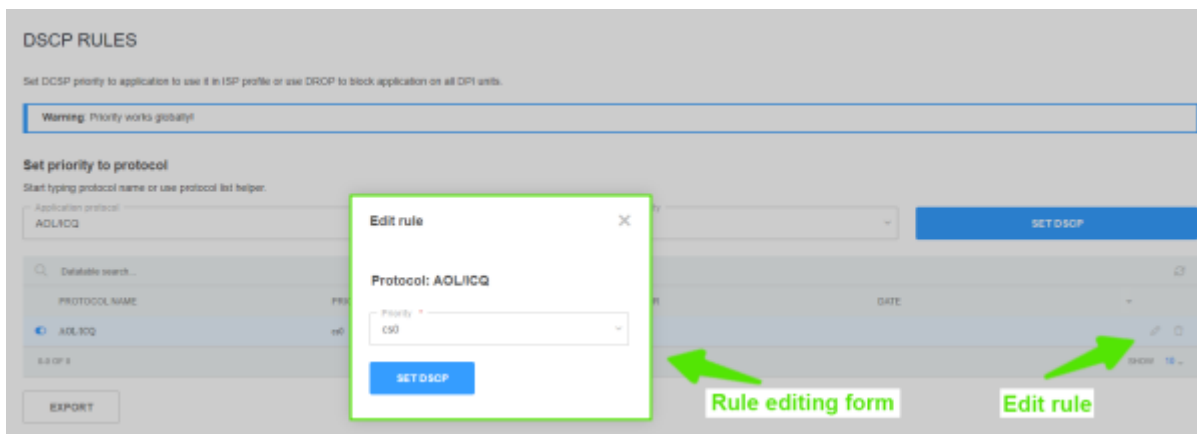


## Deleting

In the DSCP rules list click the button "Delete rule" and confirm/cancel the operation.

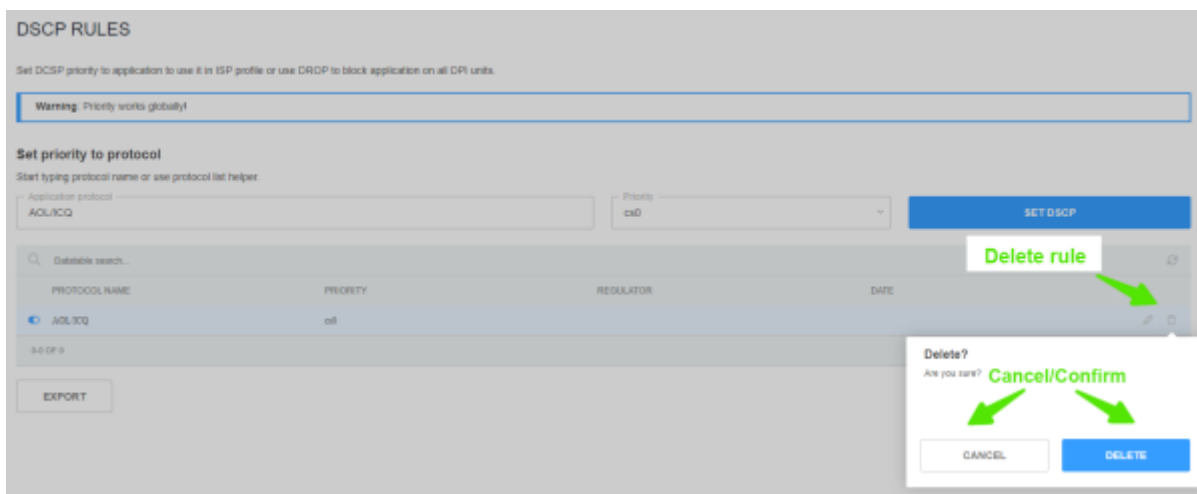

## ASN Filter

Change to the "ASN Filter" section.

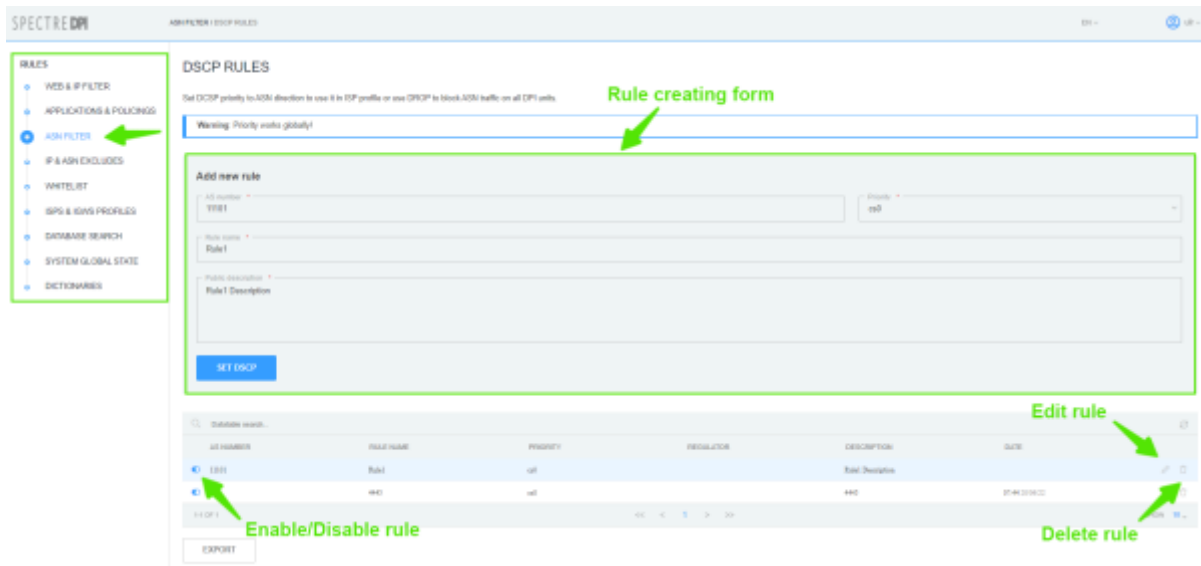

## Creating

In the form of rule creating:


- Specify the number of AS;
- Choose the priority from the list;
- Enter the rule name;
- Enter the rule description.

Save the rule by clicking on "Set DSCP" button.

## Editing

In the list of DSCP in ASN direction rules click on the "Edit rule" button. If necessary, in the popup editing form:


- choose the priority from the list;
- Enter the rule name;
- Enter the rule description.

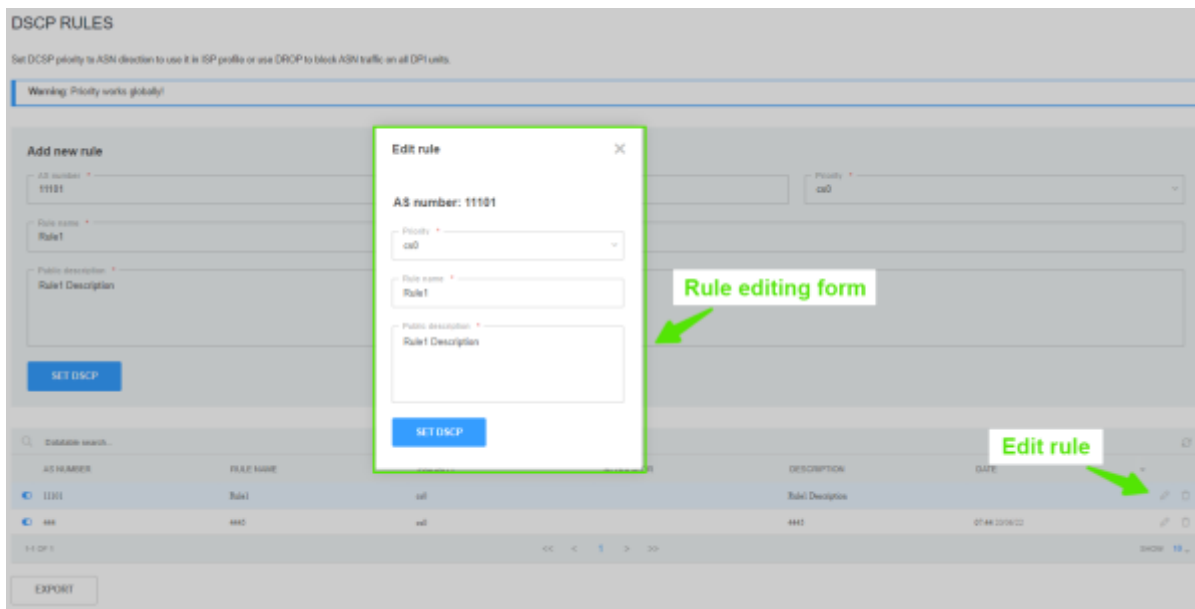

Save the changes by clicking on "Set DSCP" button.


## Deleting

In the list of DSCP in ASN direction rules click the button "Delete rule" and confirm/cancel the operation.

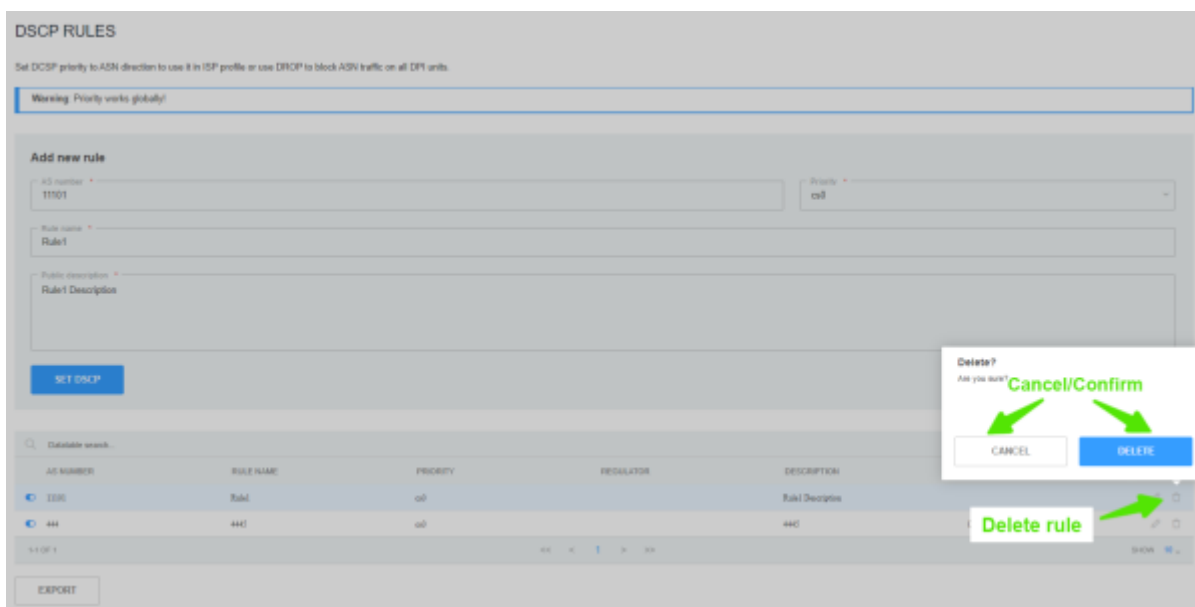


## IP & ASN Excludes

Change to the "IP & ASN Excludes" section.

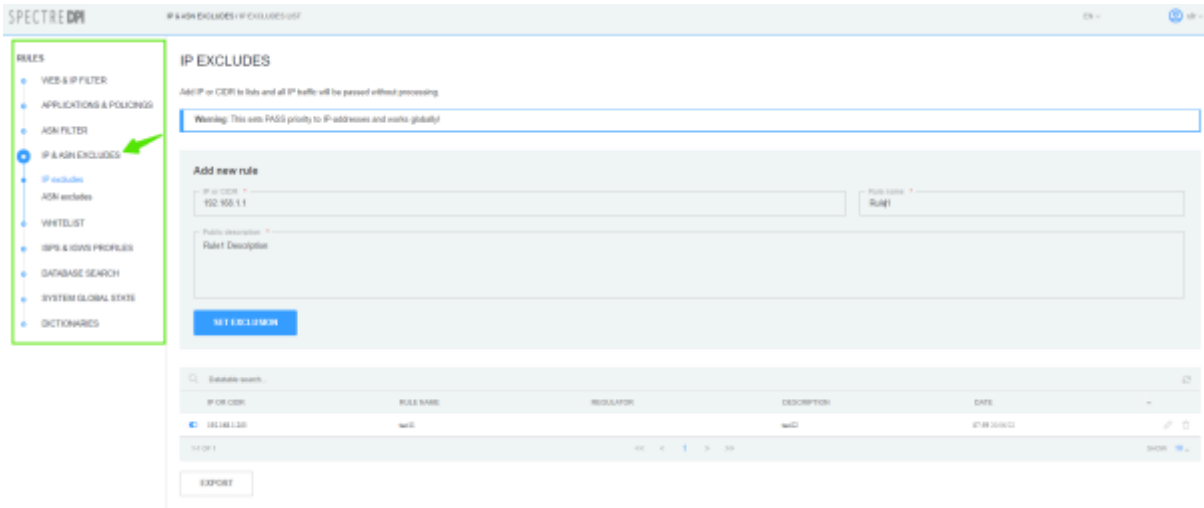

## IP Excludes

Change to the "IP & ASN Excludes" section → "IP Excludes".

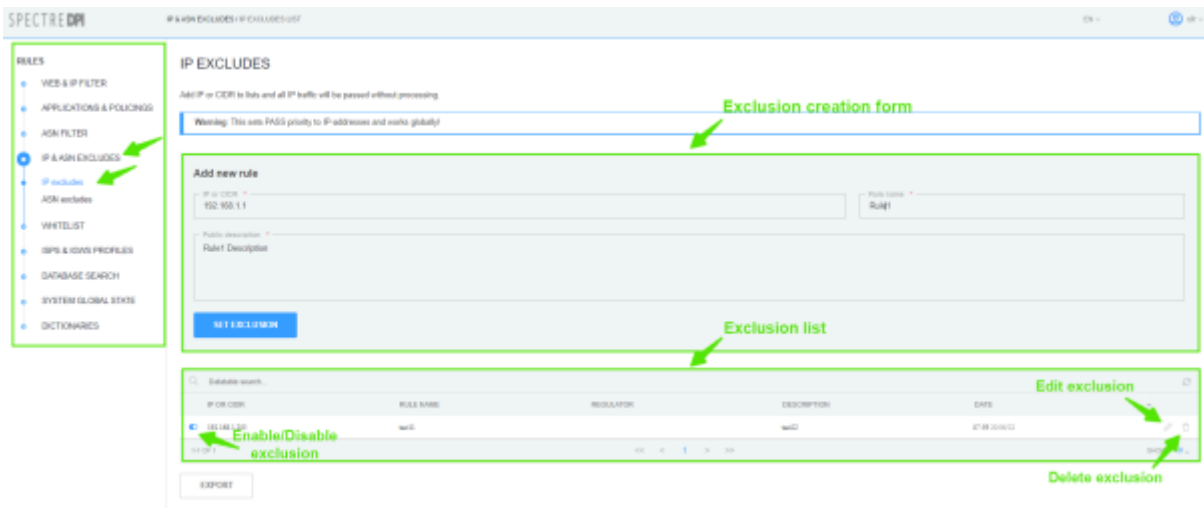

## Creating

In the form of rule creating:

- Specify IP/CIDR;
- Enter the rule name;
- Enter the rule description;

Save the rule by clicking on "Set exclusion" button.

## Editing

Click on the button "Edit exclusion". In the form of rule editing you can change:

- name of the rule;
- its description.

## Edit rule ✕

**IP or CIDR: 192.168.1.203**

Rule name \*

Public description \*

**SET DSCP**

Save the changes by clicking on "Set DSCP" button.

## Deleting

In the list of exclusions click the button "Delete exclusion" and confirm/cancel the operation.

### IP EXCLUDES

Add IP or CIDR to lists and all IP traffic will be passed without processing

Warning: This sets DSCP priority to IP-address and works globally!

**Add new rule**

IP or CIDR:  Rule name:

Public description:


**SET EXCLUSION**

IP OR CIDR	RULE NAME	REGULATOR	DESCRIPTION	
192.168.1.101	net1	net2		<p style="color: green; font-weight: bold;">Delete exclusion</p> <div style="border: 1px solid #ccc; padding: 5px; width: fit-content; margin: 0 auto;"> <p style="color: green; font-weight: bold; margin: 0;">Delete?</p> <p style="color: green; font-weight: bold; margin: 0;">Are you sure? Cancel/Confirm</p> <div style="display: flex; justify-content: space-around; margin: 0;"> <span style="border: 1px solid #ccc; padding: 2px 10px;">CANCEL</span> <span style="background-color: #007bff; color: white; padding: 2px 10px;">DELETE</span> </div> </div>

**EXPORT**

## ASN Excludes

Change to the "IP & ASN Excludes" section → "ASN Excludes".

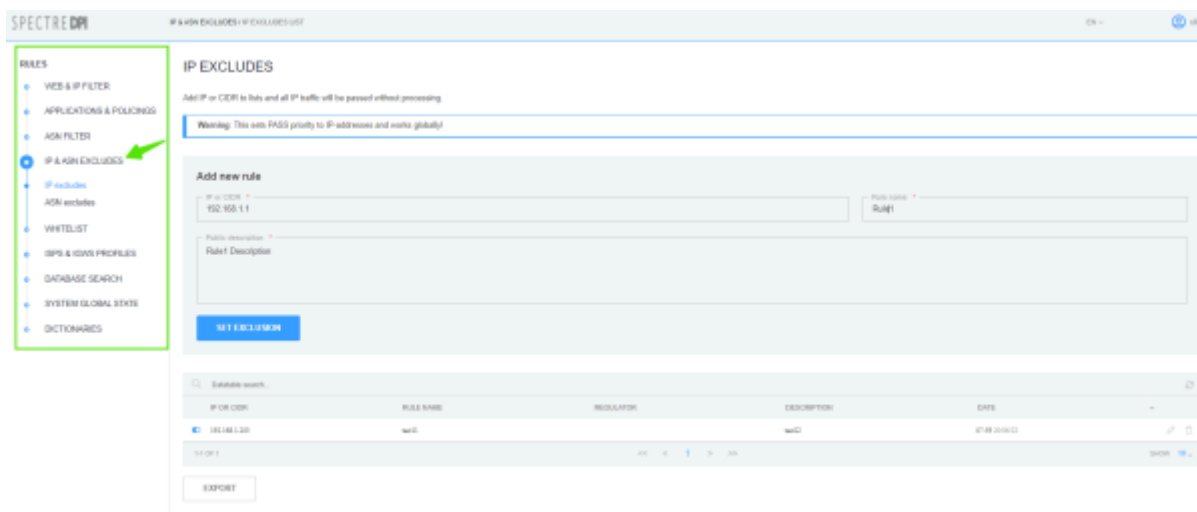

### Creating

In the form of rule creating:

- Specify AS number;
- Enter the rule name;
- Enter the rule description;

Save the changes by clicking on "Set Exclusion" button.

### Editing

Click on the button "Edit exclusion". In the form of rule editing you can change:

- name of the rule;
- its description.

### Edit rule ✕

**AS number: 1234**

Rule name \*

Public description \*

**SET DSCP**

Save the changes by clicking on "Set DSCP" button.

## Deleting

In the list of exclusions click the button "Delete exclusion" and confirm/cancel the operation.

### ASN EXCLUDES

ASN numbers to lists and all ASN traffic will be passed without processing

**Warning** This sets PASS priority to AS numbers and works globally!

**Add new rule**

AS number \*  Rule name \*

Public description \*

**SET EXCLUSION**

AS NUMBER	PUBLIC NUMBER	REGULATOR	DESCRIPTION	DATE	
1234	12345		12345	2020-10-10 10:10	<b>Delete exclusion</b>

**Delete?**  
Are you sure?  
**Cancel/Confirm**

# VIP Subscriber Management

## VIP Subscribers and their privileges

**VIP Subscriber** is a special subscriber whose traffic is passed with a dedicated priority (cs0 by default) regardless of the priority settings for application protocols. The allocated priority is set by the special\_dscp configuration parameter. See section [Configuration](#). The subscriber is connected through the installation of service 15 on DPI.

Privilege:


- Free access to applications and resources that are subject to restrictions on use.

## Purpose of section

This section is designed to manage VIP Subscribers.

## Getting started with section

Go to "IP & AC Exclusion" → "VIP Subscribers".

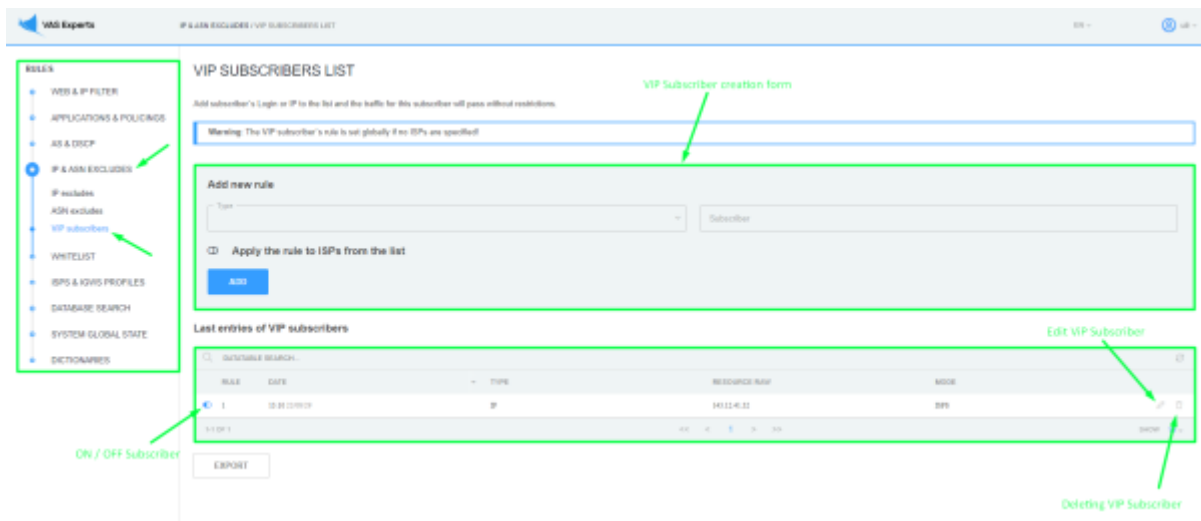

## Creation

In the form of creating a VIP Subscriber:

- BSelect the type of IP or Login from the drop-down list;
- Specify IP or Login in the Subscriber field, depending on what you have chosen in the drop-down list;
- You can apply the rule to an ISP from the list and select multiple ISPs or click on the "Select All" button. If you accidentally clicked the "Select All" button, then click on the "Uncheck All" button;
- If your slider is disabled on apply to specific ISPs, then the new rule will be set globally to all ISPs.

**Add new rule** Enable or disable application to a specific ISP

Type: IP Subscriber: 152.164.12.195

Apply the rule to ISPs from the list

---

Select ISP which the rule will be applied

ISP  Ростелеком  SkyNet  
 ДомРy  MNS

Add VIP Subscriber

Save the VIP Subscriber by clicking the "Add" button.

## Editing

Click on the "Edit VIP Subscriber" button. In the rule editing form, you can change:

- Application to certain ISPs from the list;
- Remove or add ISP.

**Edit rule** ✕

**VIP subscriber IP is 143.12.41.32.**

Apply the rule to ISPs from the list

---


Select ISP which the rule will be applied

ISP  Ростелеком  SkyNet  
 ДомРy  MNS

Save your changes by clicking the "Save" button.


## Deleting

In the list of VIP Subscribers, click on the "Delete VIP Subscriber" button and, in the window that appears, confirm or cancel the deletion.

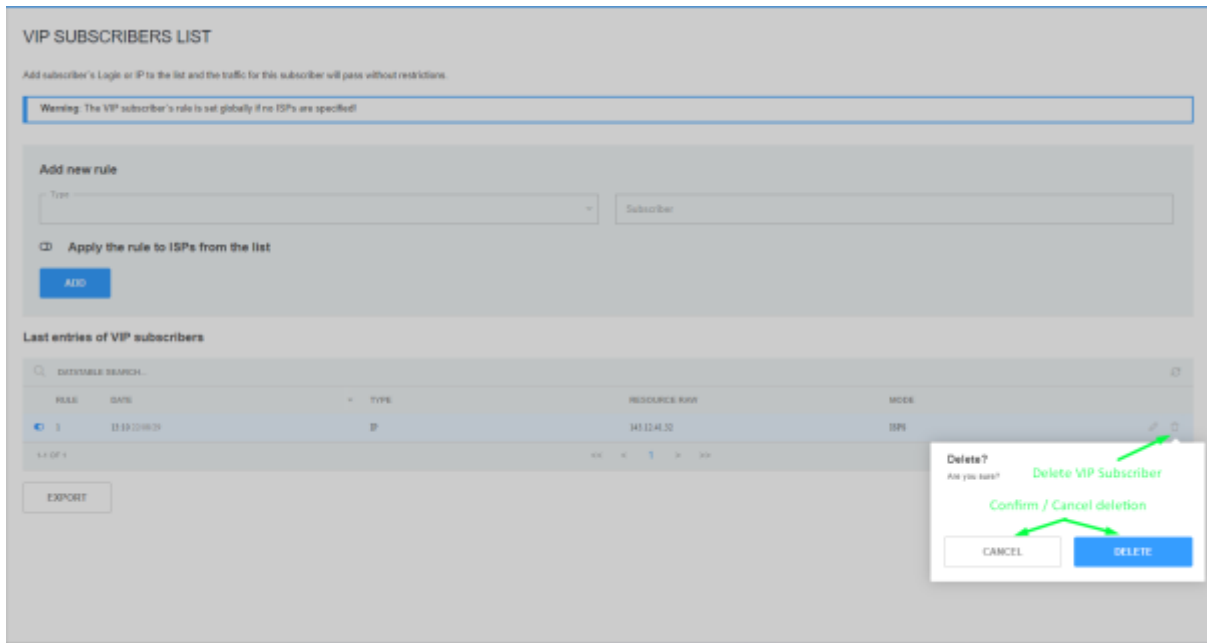

## ISP Configuration

Change to the "ISPs & IGWS Profiles" → "ISPs List".

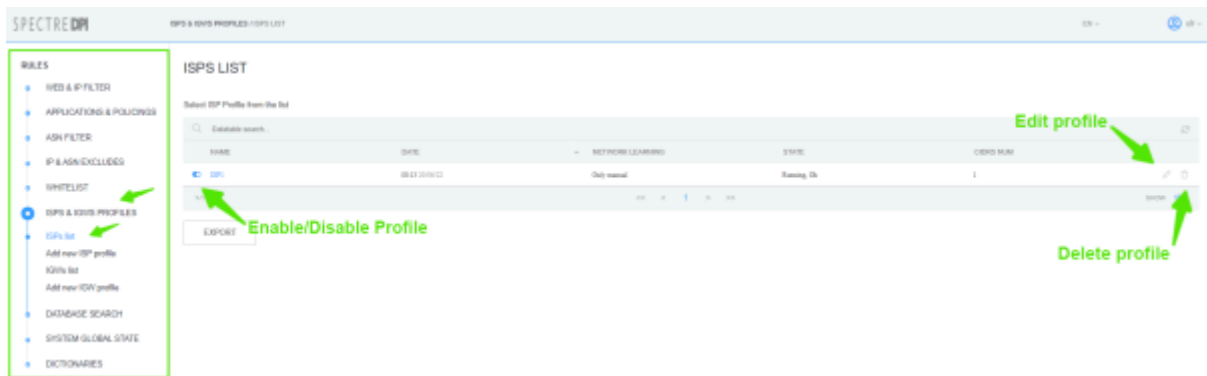


## Creating an ISP Profile

To create new IGW profile go to the "ISPs & IGWS Profiles" section → "Add new ISP Profile".

In the form specify:

- Name of ISP profile;
- Choose the border from the list;
- Login to be used on the DPI node;
- Prefix for lists on the DPI node (it will be used as the name of service profile on the node);
- Choose bridges of the border;
- Choose Network training to get the addresses of this profile;
- Specify address/networks of the ISP (if necessary).

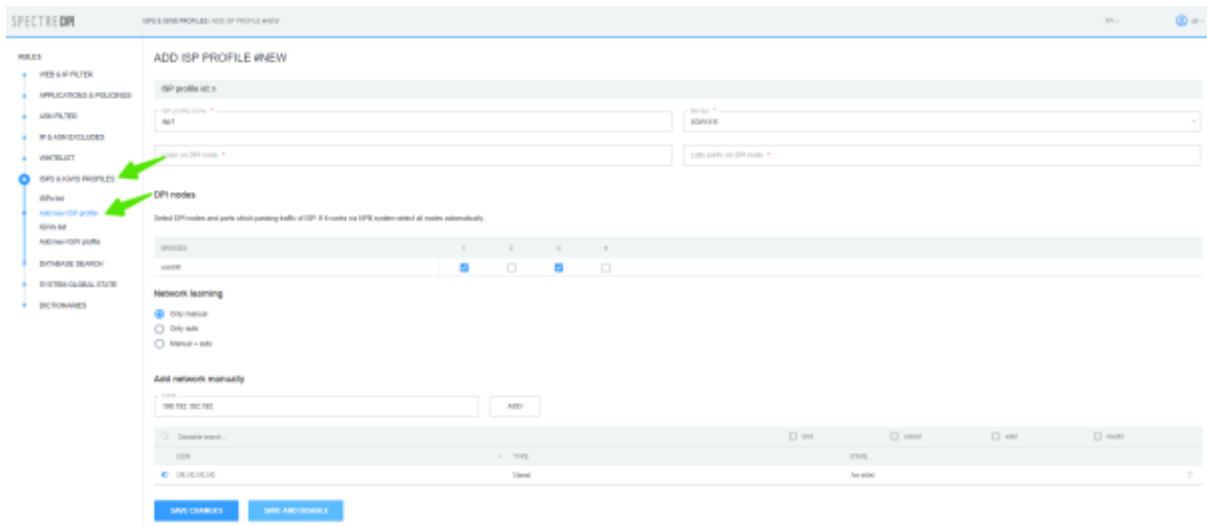

Click on the button "Save changes" or "Save and Disable/Enable".



After creation the ISP profile is enabled by default. Only enabled profiles are uploaded to DPI nodes.


## Editing ISP Profile

In the "ISPS & IGWS Profiles" section → "ISPs list" click on the button "Edit Profile".

A modal form for creating/editing ISP profile will pop up; make the changes you need and click on the "Save changes" or "Save and Disable/Enable" button.

## Deleting ISP Profile


In the "ISPS & IGWS Profiles" section → "ISPs List" click on the "Delete" button and confirm/cancel the action.

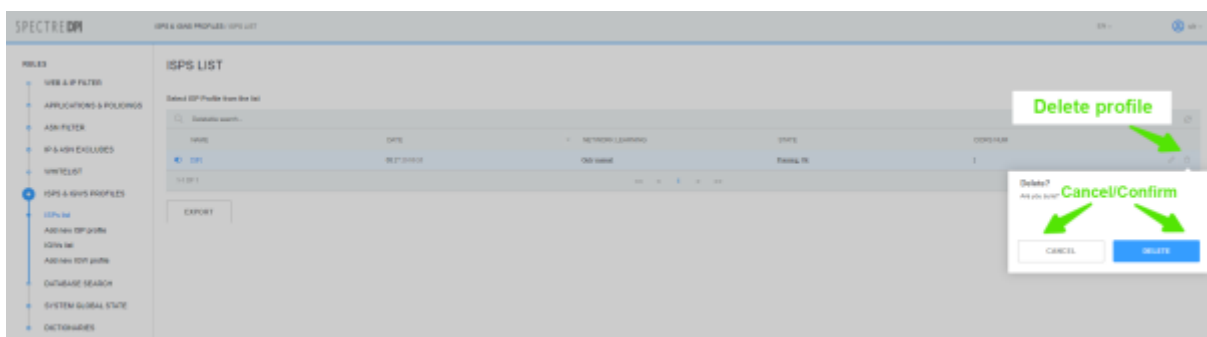

**Attention:** Before deleting the profile, make sure there are no rules referring to this profile!

## Policing Profile

Change to the "Applications and Policing" profile → "Policing Profiles".

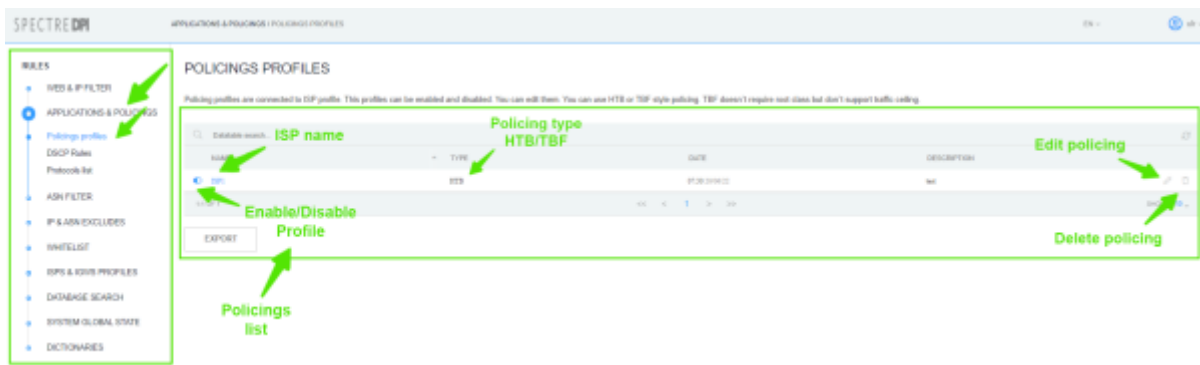

## Editing Policing Profile

Click on the "Edit policing" button.

EDIT APPLICATION POLICING PROFILE #1

Policing profiles are connected to ISP profile. This profiles can be enabled and disabled. You can edit them. You can use HTB or TBF style policing. TBF doesn't require root class but don't support traffic ceiling.

Profile name: ISP1 (Enabled) ISP profile configuration

Description:

Policing type:

Inbound profile:

INBOUND RATE	UNIT	CEIL	UNIT	ENABLE
110	Mbps	0	Gps	<input type="checkbox"/>
0	Gps	150	Mbps	<input type="checkbox"/>
0	Gps	150	Mbps	<input type="checkbox"/>
0	Gps	150	Mbps	<input type="checkbox"/>
0	Gps	150	Mbps	<input type="checkbox"/>
0	Gps	150	Mbps	<input type="checkbox"/>
0	Gps	150	Mbps	<input type="checkbox"/>
0	Gps	150	Mbps	<input type="checkbox"/>

- Applications CS8 list
- Applications CS1 list
- Applications CS2 list
- Applications CS3 list
- Applications CS4 list
- Applications CS5 list

In the popup editing form:

- Enter policing description;
- Choose policing type TBF/HTB (form with class values will look different depending on the type selected)



You can use configuration autocomplete:

- For HTB type: rate=8Bps, ceil=value that was specified in autocomplete form;
- For TBF type: rate=value that was specified in autocomplete form.

To save the changes click on the button "Save profile" or "Save and disable/enable".



Thy policing profile is disabled by default.

## Deleting Policing Profile

There are two ways to delete the profile: by clicking "Delete profile" button in the list of policing profiles or the same button on Editing Profile page.

## WEB and IP Filter

### Locking Rules List

Change to the "WEB and IP Filter" section.

**Number of blocked resources (by type)**

TYPE	ACTIVE	DISABLED	TOTAL
CDI	4	0	4
SDI	4	0	4

**List of blocked resources**

REGID	DATE	TYPE	RESOURCE NAME	RESOURCE VALIDATED	REGULATOR	REASON	EDIT
Standard	1118.2016.07	SDI	mail.ru	*mail.ru	RDD1	Taxi	✎
Standard	1118.2016.07	SDI	mail.ru	mail.ru	RDD1	Taxi	✎
Standard	1118.2016.07	CDI	mail.ru	*mail.ru	RDD1	Taxi	✎
Standard	1118.2016.07	CDI	mail.ru	mail.ru	RDD1	Taxi	✎
Standard	1118.2016.07	CDI	mail.ru	mail.ru	RDD1	Taxi	✎
Standard	1118.2016.07	SDI	mail.ru	*mail.ru	RDD1	Taxi	✎
Standard	1118.2016.07	SDI	mail.ru	mail.ru	RDD1	Taxi	✎
Standard	1118.2016.07	SDI	mail.ru	*mail.ru	RDD1	Taxi	✎

**Edit rule**

## Creating/Editing Locking Rules

- To create new locking rule for a resource, change to the "WEB and IP Filter" section → "Add new rule";
- To edit an existing rule change to the "WEB and IP Filter" section and click on "Edit rule" button.

In the popup form:

- Choose the regulator;
- Choose the category;
- Enter rule public description;
- Enter rule hidden description;

## ADD RULE #NEW

The screenshot shows the 'ADD RULE #NEW' form. At the top, there are fields for 'Resource' (REG 111) and 'Category' (CAT 111). Below these are 'Public description' and 'Internal description' fields. A green arrow points to the 'Validation form' section, which includes a 'Resource' field with 'facebook.com' and a 'Type' dropdown set to 'URL'. A blue 'VALIDATE' button is next to it. Below the validation form is a red box containing the 'Validation result' text: 'This is SSL/TLS resource. We can block FULL DOMAIN! Next SAN and CN will be added to the list. SAN: facebook.com, SAN: \*.facebook.com, CN: facebook.com, CN: \*.facebook.com'. A green arrow points to this red box. At the bottom, there are 'ADD TO LIST' and 'IMPORT FROM FILE' buttons.

In the resource validation form, enter the resource and choose its type:

- If it is not necessary to validate the resource, just click on "Add to the list" button;
- Click on the "Check" button. Information about the resource will be displayed. It can be added to the rule locking list. To do this, click the "Add to List" button.

The screenshot shows the 'List of resources' section. It features a table with columns: TYPE, RESOURCE ANY, RESOURCE VALIDATED, STATUS, and a 'Delete resource' button. The table contains four rows of resources for 'facebook.com'. A green arrow points to the 'Delete resource' button. Below the table is a 'CLEAR ALL' button. A green arrow points to the table with the label 'Resources list in the rule'. Below the table is a section titled 'Apply the rule to ISPs from the list' with a checkbox and 'SELECT ALL' and 'UNSELECT ALL' buttons. A green arrow points to this section with the label 'Applying the rule to ISP profile'. At the bottom, there is an 'Actions log' table with columns: DATE, USER, ACTION, NEW VALUE, and OLD VALUE. The table is currently empty, showing 'Data not found'. There are 'SAVE CHANGES' and 'SAVE AND DISABLE' buttons at the bottom.

In the subsection for binding rules to ISP profiles:

- If the option "Apply the rule to ISP from the list" is **disabled**, such rule will be global. Resources from this rule will be included in the global lists of blocked resources.
- If the option "Apply the rule to ISP from the list" is **enabled**, such rule will be applied only to those ISP profiles, which are noted in this rule. Resources from this rule will be included in the locking lists for these ISP profiles.

## Deleting the Locking Rule

Change to the "WEB and IP Filter" section and click on the "Edit the rule" button.

Select type of resource and put the URL, SNL, CN, IP, IP-PORT or CIDR in this field.

Resource:  Type:


**List of resources**

TYPE	RESOURCE NAME	RESOURCE VALUATED	STATUS
CD	facebook.com	facebook.com	Valid
CD	facebook.com	*facebook.com	Valid
SDC	facebook.com	facebook.com	Valid
SDC	facebook.com	*facebook.com	Valid

**Apply the rule to ISPs from the list** The rule will be applied for all ISPs by default.

**Actions log**

DATE	USER	ACTION	NEW VALUE	OLD VALUE
11.23.2019 12:12	all	The rule created		

 **Attention:** Before deleting a rule, make sure it does not refer to any ISP profile.

## Domain Check

Change to the "WEB and IP Filter" section → "Check domain".

**SPECTRE DM** WEB & IP FILTER | CHECK DOMAIN

**RALES**

- WEB & IP FILTER
- Add new rule
- Check domain
- Search database
- APPLICATIONS & POLICIES
- ASN FILTER
- IP & ASN EXCLUDES
- WHITELIST
- ISPs & ISPs PROFILES
- DATABASE SEARCH
- SYSTEM GLOBAL STATE
- DICTIONARIES

**CHECK DOMAIN**

Enter IP or URL with http/https prefix to check resource create correct rule

Resource check:

**Domain check form**

In the "Resource Check" field type in the URL of resource to be checked. Then click on the "Check" button. Information about the specified resource will be displayed below the form:

- SSL/TLS, locking type;
- Certificate information;
- DNS list;
- Recommendations about the values to use to lock this resource.

## CHECK DOMAIN

Enter IP or URL, with http/https prefix to check resource create content rule

Resource name:

This is SSL/TLS resource. Type of block is FULL DOMAIN

SSL/TLS, locking type

Certificate info

### Certificate general information

Common name	www.abc.com
DNs	
DN	www.abc.com
DN	*.abc.com
DN	www.abc.com
DN	www.abc.com
DN	www.abc.com
DN	www.abc.com
Total number of DN's	6
SSL	
Signature algorithm	sha256WithRSAEncryption
Key type	RSA
Key size	2048 bits
Serial Number	2712228713424705874731
Iss Subj	12.34.56.78
Iss date	04.08.2018 10:00
Number of uses	0

### DNS info

TYPE	DOMAIN NAME	ADDRESS	TTL
A	www.abc.com	12.34.56.78	300
A	www.abc.com	12.34.56.78	300
A	www.abc.com	12.34.56.78	300
A	www.abc.com	12.34.56.78	300
NS	www.abc.com	ns1.abc.com	86400
NS	www.abc.com	ns2.abc.com	86400
NS	www.abc.com	ns3.abc.com	86400
NS	www.abc.com	ns4.abc.com	86400
SOA	www.abc.com	ns1.abc.com	3600
SOA	www.abc.com	ns1.abc.com	3600

### Result information

To block this resource only with certificate use

QID	www.abc.com
QID	*www.abc.com
QID	www.abc.com
QID	*www.abc.com

DNS list

Recommendations for resource locking

Download file to report to rule


DOWNLOAD FILE 1

## Search the Database (among the blocking rules)

Change to the "WEB and IP Filter" section → "Search Database".

In the "IP, CIDR, Domain, Notes" field enter the value in accordance with the prompts at the top of the page. Then choose type of search: Full Text, By Resources or By Description. Click on "Search" button.


As a result, all blocking rules that match the selected search parameters will be displayed.

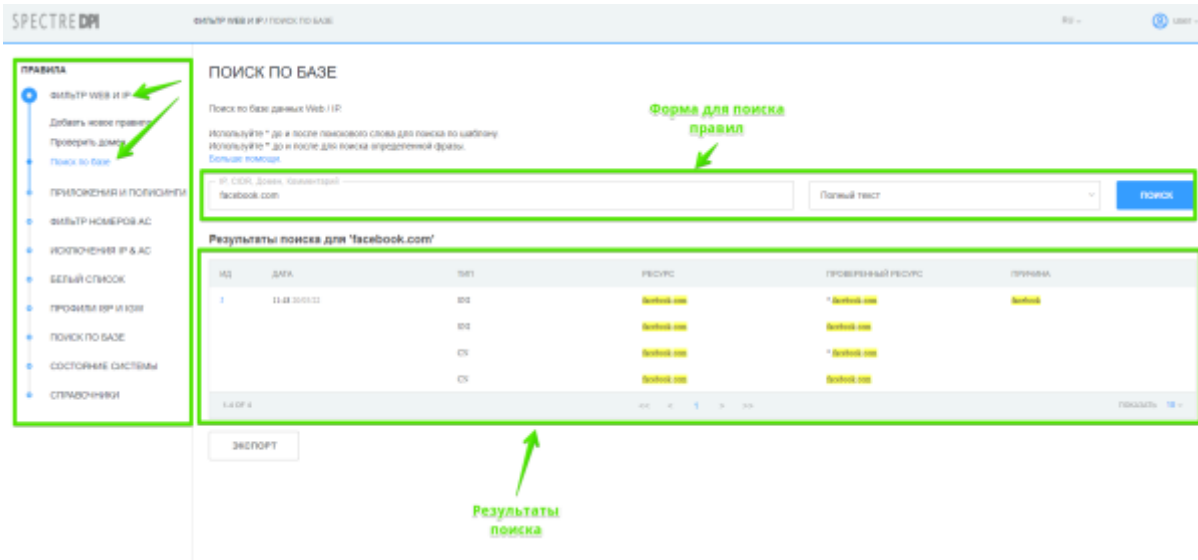

## Whitelist

### Whitelist rule list

Change to the "Whitelist" section.

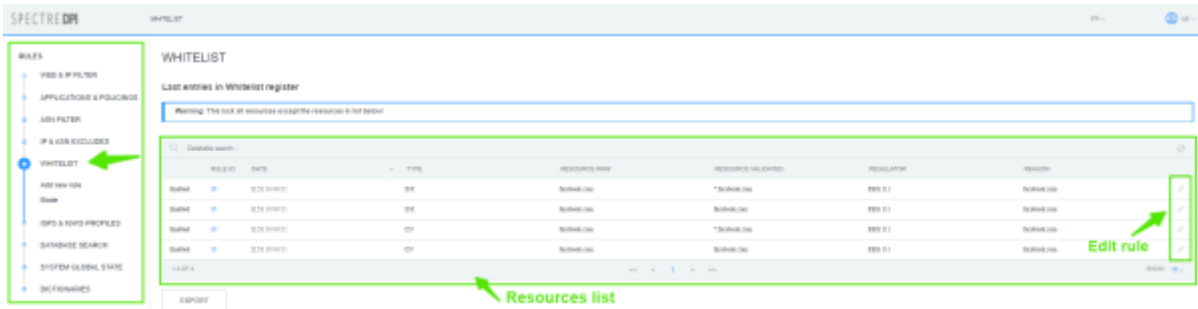


### Creating/Editing the white list

- To create a new white list rule change to the "Whitelist" section → "Add new rule";
- To edit an existing rule change to the "White list" section and click on the "Edit rule" button.


In the popup form:

- Choose the regulator;
- Choose the category;
- Enter rule public description;
- Enter rule hidden description;

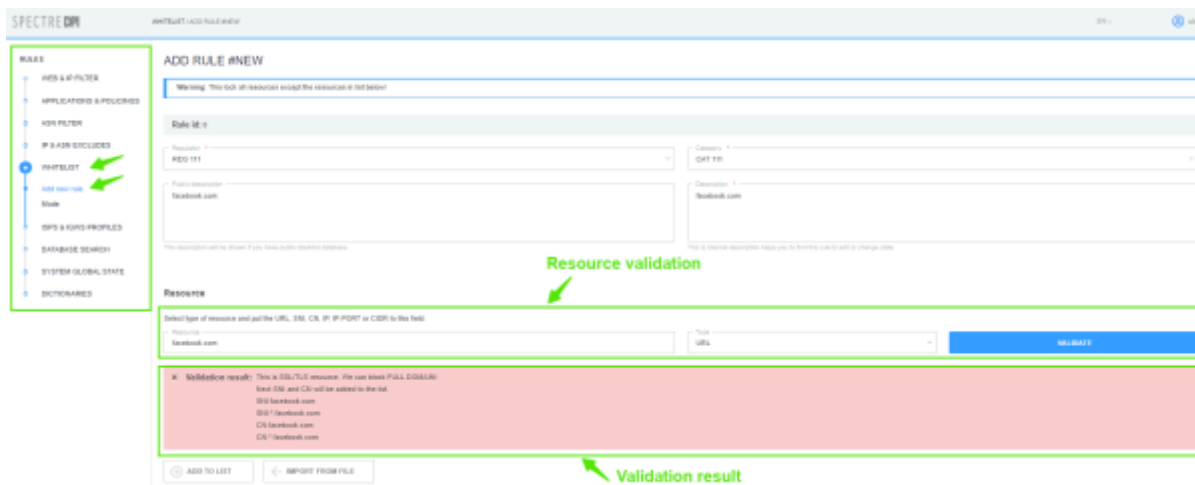

In the resource validation form, enter the resource and choose its type:

- If it is not necessary to validate the resource, just click on “Add to the list” button;
- Click on the “Check” button. Information about the resource will be displayed. It can be added to the rule locking list. To do this, click the “Add to List” button.

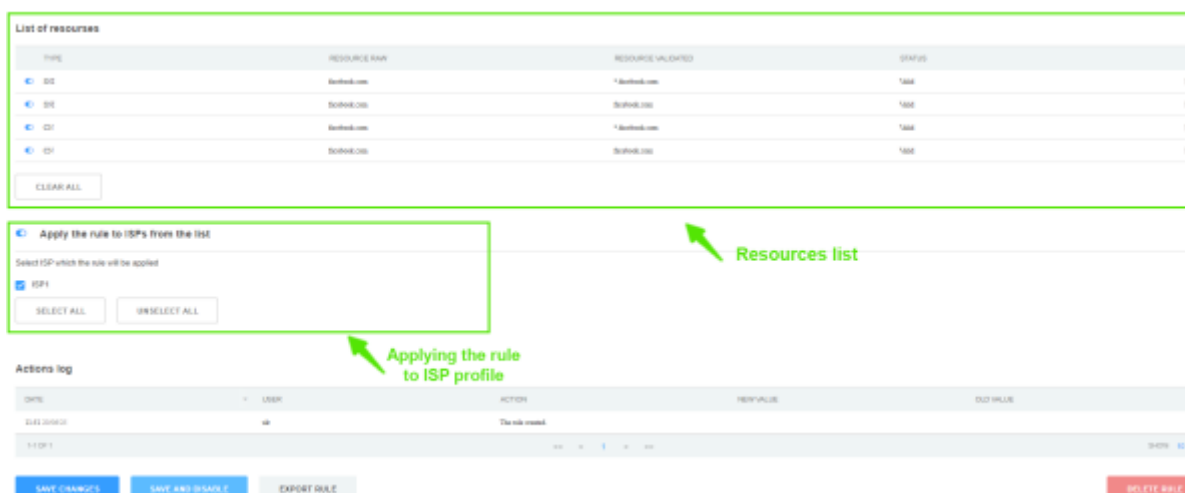

In the subsection for binding rules to ISP profiles:

- If the option “Apply the rule to ISP from the list” is **disabled**, such rule will be global. Resources from this rule will be included in the global lists of blocked resources.
- If the option “Apply the rule to ISP from the list” is **enabled**, such rule will be applied only to those ISP profiles, which are noted in this rule. Resources from this rule will be included in the locking lists for these ISP profiles.

## Deleting a white list rule

Change to the “Whitelist” section and click on the “Edit the rule” button.

**Resource**

Select type of resource and put the URL, DNS, CIDR, IP, IP:PORT or CIDR to this field

Resource:  Type:

**List of resources**

TYPE	RESOURCE RULE	RESOURCE ALLOCATED	STATUS
IP	Resource.com	Resource.com	1000
IP	Resource.com	*Resource.com	1000
IP	Resource.com	Resource.com	1000
IP	Resource.com	*Resource.com	1000


Apply the rule to ISPs from the list The rule will be applied for all ISPs by default.

**Actions log**

DATE	USER	ACTION	RESOURCE	STATUS
2023-01-01	IP	Disable rule		

14 OF 1

**Delete rule**

 **Attention:** Before deleting a rule, make sure it does not refer to any ISP profile.

## Whitelist operating mode management

Change to the "Whitelist" section → "Mode".

**SPECTRE DPI**

**WHITELIST / MODE**

**Global Whitelist**  
Set mode for Global Whitelist. If activates all Whitelist rules marked as global. The Global Whitelist rules applied for all ISPs.

State:  **Enable/Disable whitelist**

**Whitelist for ISPs**  
Set Whitelist mode for ISPs. If enabled for some ISP the Whitelist rules which connected to ISP will be applied.

ISP	WHITELIST
ISP	<input type="checkbox"/>

- With the global whitelist mode enabled, the whitelist service is applied to all ISP profiles and resource lists are formed only from global whitelist rules;
- When the whitelist mode is enabled for a separate ISP profile, the service is applied only to ISP which has it enabled. The lists are formed only from white list rules which refer to this ISP profile;
- If both mode are enabled, global and separate ISP rules lists are concatenated. For other ISPs, the whitelist service is used with only the global whitelist rules.

## Database search (global)

Change to the "Database search" section.

In the "IP, CIDR, Domain, Comment" field enter the value in accordance with the prompts at the top of the page, choose search type: Full Text, By Resources or By Description. Click on "Search" button.

